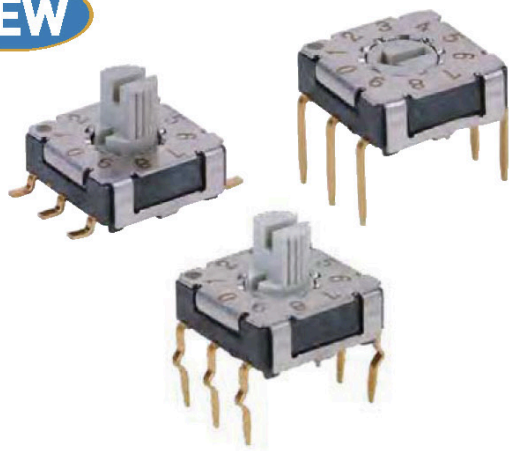


COMPACT ROTARY DIP SWITCH 7.2x7.2 Size, Height: 2.9mm


NEW


General Specification


- 1. Rating :** 100mA, DC 5V (Switching)
100mA, DC 50V (None-Switching)
- 2. Contact Resistance :** 100mΩ Max.
- 3. Insulation Resistance :** 100MΩ Min. at DC 100V
- 4. Operating Force :** 200gf Max.
- 5. Life Cycle :** 10,000 steps
- 6. Sealing :** IP67 (Dust & water proof)

GENERAL DIMENSION



Through Hole Type Layout

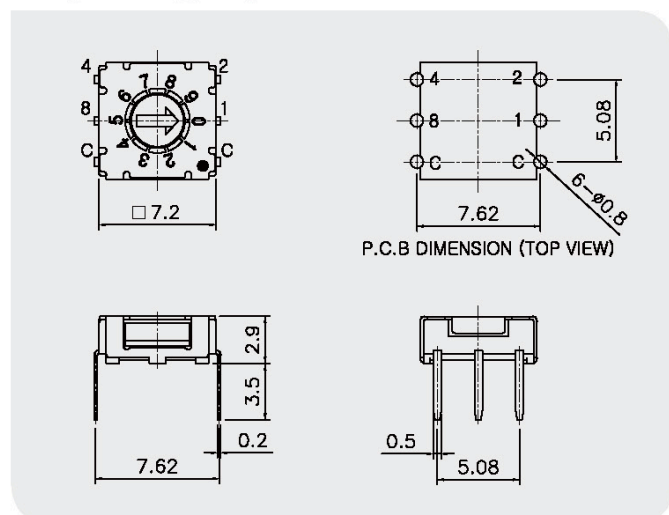

SMD Gull wing Type Layout

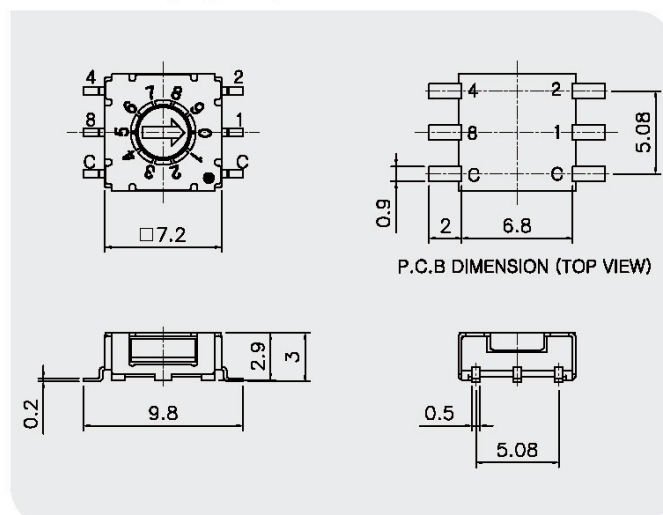

Crimped Type Layout

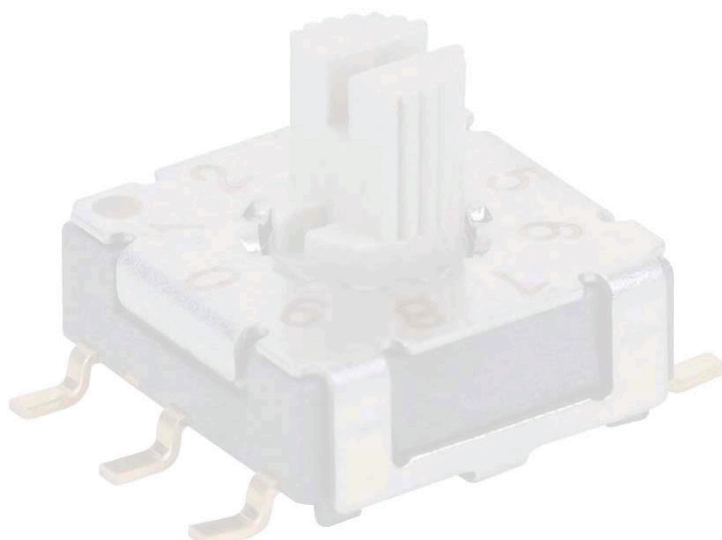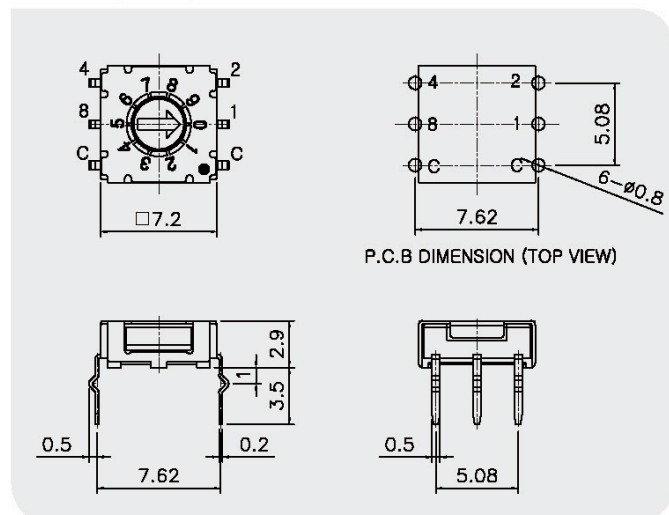



RS10 Series

COMPACT ROTARY DIP SWITCH 7.2x7.2 Size, Height: 2.9mm

HOW TO ORDER

RS10
D
R
10
S
TR

Type

Actuator

Code

Position

Terminal

Packing

GS 7.2 X 7.2 Size
Height 2.9mm

D Arrow (Height = 0mm)
M Slotted spindle (Height = 3mm)
E Cross (Height = 0mm)



R Real Code
C Complement Code
*Other codes are available
upon the request.

10 10 Position
16 16 Position

- Through-Hole (Ter' 3 X 3)
S SMD Gull Wing
K Crimped

- Tube Packing
TR Reel Packing













1. Type

RS10
RS10 Type


2. Actuator

D
D Arrow (Height=0mm)

M Slotted Spindle (Height = 3mm)

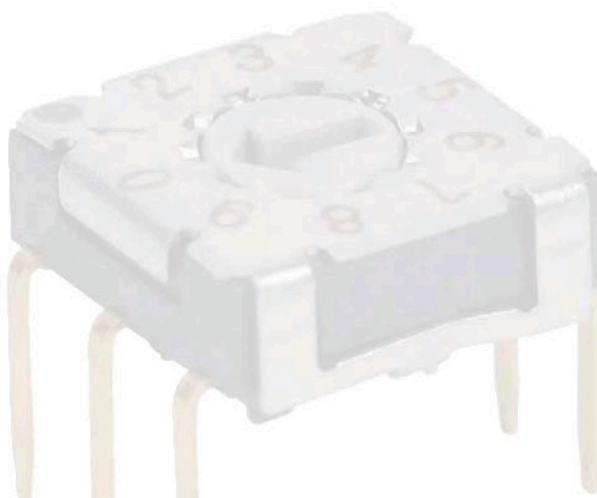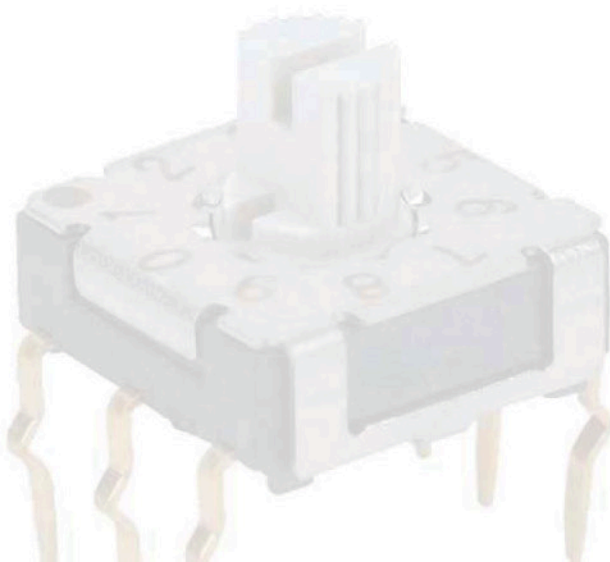E Cross (Height=0mm)




COMPACT ROTARY DIP SWITCH 7.2x7.2 Size, Height: 2.9mm

3. Code & Position



R Real Code

10 Position	C	1	2	4	8
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					

16 Position	C	1	2	4	8
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

C Complement Code

10 Position	C	1	2	4	8
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					

16 Position	C	1	2	4	8
0					
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

* Special codes are available upon the request.









4. Terminal



- Through-Hole (Ter' 3x3)

K Crimped (Ter' 3x3)

S SMD (Ter' 3x3)

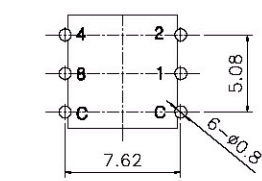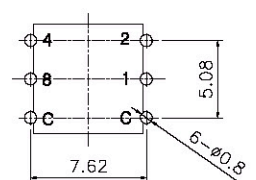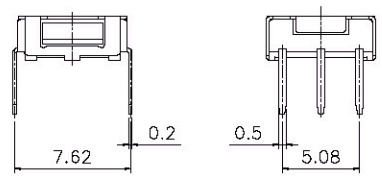

P.C.B DIMENSION (TOP VIEW)

P.C.B DIMENSION (TOP VIEW)




P.C.B DIMENSION (TOP VIEW)

5. Packing



- Tube Packing (Q'ty: 70Pcs/Tube)

TR



Through-Hole Type & Crimped Type

M Type Actuator (Height : 3mm)


SMD Type

Reel Packing (See Page 13)

COMPACT ROTARY DIP SWITCH 7.2x7.2 Size, Height: 2.9mm Tape & Reel Packing

1. 'D' & 'E' Type Actuator with SMD Terminal

(RS10-DR-xxS)
(RS10-ER-xxS)

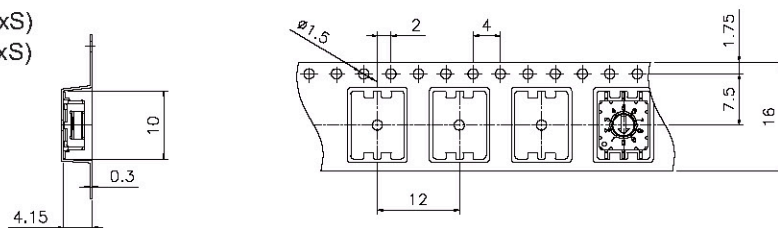


Units(pcs)

1,300



2. 'M' Type Actuator with SMD Terminal

(RS10-MR-xxS)

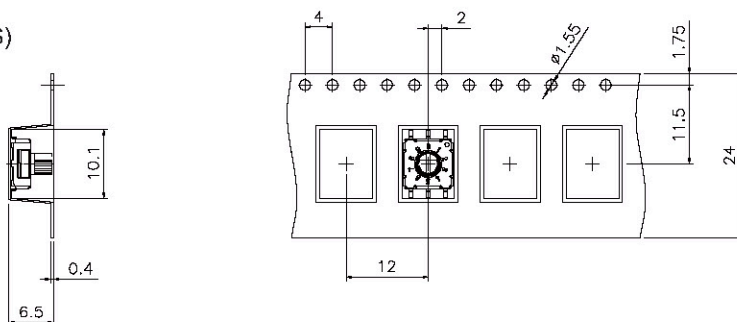

Units(pcs)


800

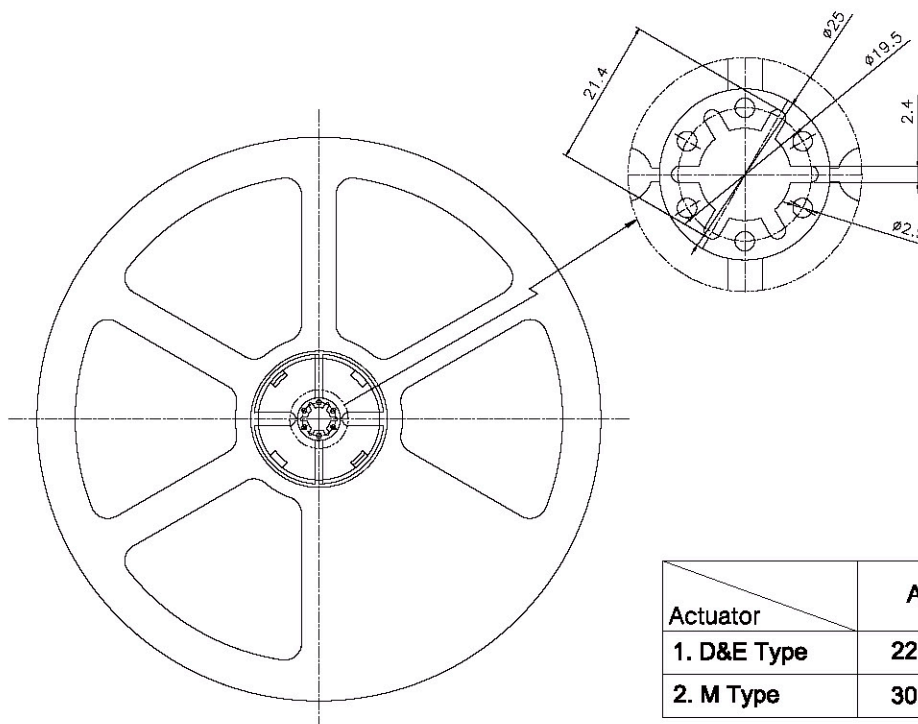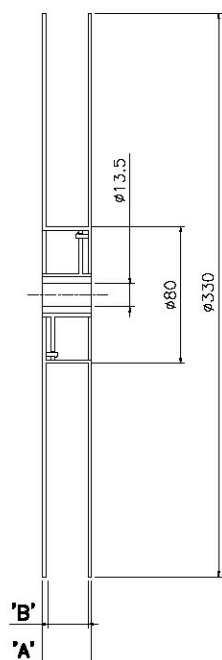

Actuator	A	B
1. D&E Type	22.4	16.4
2. M Type	30.4	24.4

End

Start

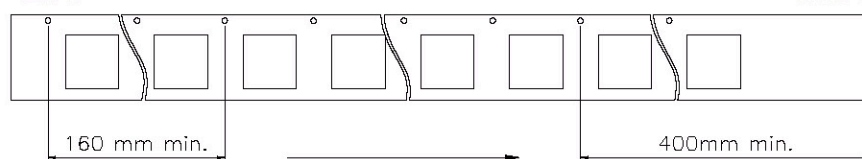

End Section

Direction of Section

Advance