
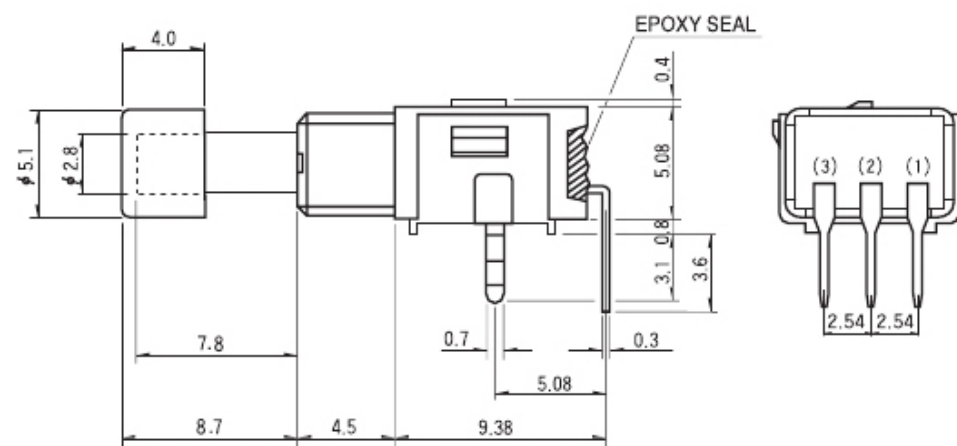


SPDT

SP-12LH

SP-12LH

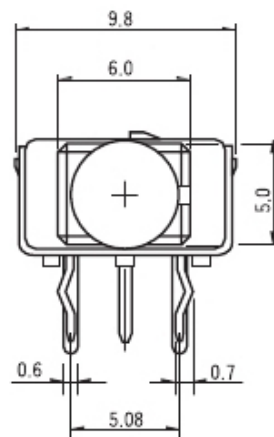

Order Code Order 选型表

	Type	Poles	Circuit	Push Length	Terminals	SMD Type
ex)	SP	1	2	S	H	S

General Specification 产品性能

1. Rating 工作电流, 电压	0.4VA at 28V AC or DC Max.
2. Contact Resistance 接触电阻	Max 50m Ω
3. Insulation Resistance 绝缘电阻	Min 500M Ω , at DC 500V
4. Operating Force	1 Minute at AC 500V

1

Single

1

OFF-(ON)

2

ON-(ON)

()

: Momentary

F

0 mm

P

3.3 mm

S

5.4 mm

L

7.8 mm

P

Straight

B

Straight W / Bracket

H

Right Angle W / Bracket

V

Virtual W / Bracket

操作力

5. Life Cycle

使用寿命

250±100gf (1 pole),
350±100gf (2pole)

6. Travel

移动

1.1mm

7. Ambient Temp. Range


环境温度范围

-30℃~ + 85℃

8. Solder Conditions

焊接方式

5 sec, 270℃

MODEL	POLES	CIRCUIT		SCHEMATICS
		NORMAL	DOWN	
SP-11	SPST	OFF	(ON)	
SP-12	SPDT	ON 2-3	(ON) 1-2	