
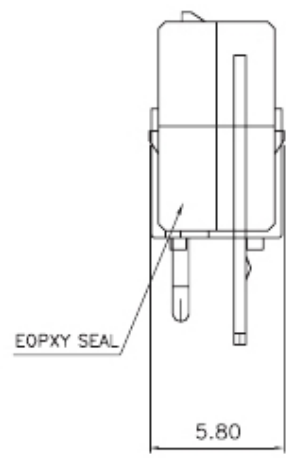
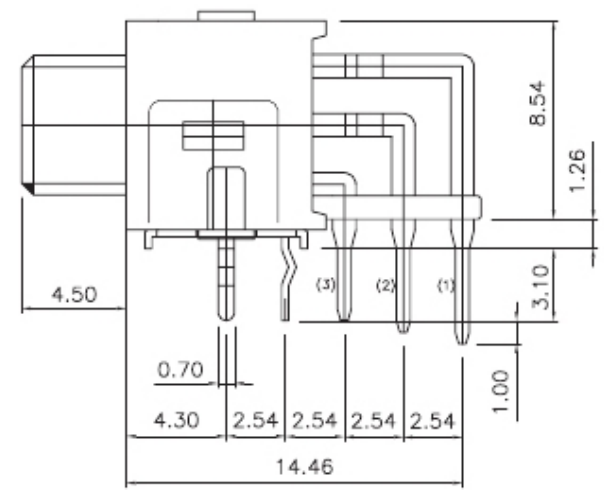


SPDT

SP-12FV

SP-12FV

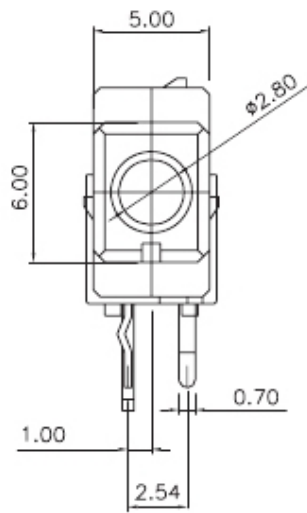


Order Code Order 选型表

Type	Poles	Circuit	Push Length	Terminals	SMD Type

General Specification 产品性能

1. Rating 工作电流, 电压	0.4VA at 28V AC or DC Max.
2. Contact Resistance 接触电阻	Max 50m Ω

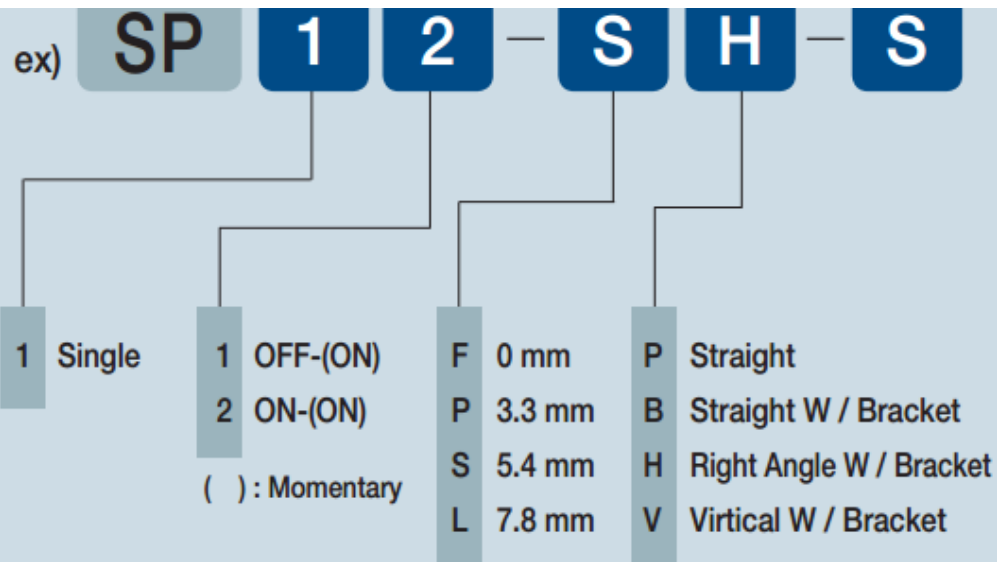

接触电阻

3. Insulation Resistance Min 500M Ω , at DC 500V
 绝缘电阻
4. Operating Force 1 Minute at AC 500V
 操作力
5. Life Cycle 250 $\pm$ 100gf (1 pole),
 使用寿命 350 $\pm$ 100gf (2pole)
6. Travel 1.1mm
 移动
7. Ambient Temp. Range -30 $^{\circ}$ C ~ + 85 $^{\circ}$ C
 环境温度范围
8. Solder Conditions 5 sec, 270 $^{\circ}$ C
 焊接方式

MODEL	POLES	CIRCUIT		SCHEMATICS
		NORMAL	DOWN	
SP-11	SPST	OFF	(ON)	
SP-12	SPDT	ON 2-3	(ON) 1-2	

