


SPECIFICATIONS


CONTACT RATING: 100mA max, 42 VAC/DC
MECHANICAL LIFE: 1,000,000 cycles
CONTACT RESISTANCE: 100mΩ max. (initial)
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 2,000VAC
OPERATION FORCE: 3N ± 0.75N max

MATERIALS


SWITCH HOUSING: PBT/PA46 (UL94 V-0)
TRANSPARENT ACTUATOR: PC (UL94 V-0)
ACTUATOR: ABS
CONTACT: Stainless, Au version tin-plated
TERMINALS: Brass, Au version tin-plated
TERMINAL SEAL: Epoxy

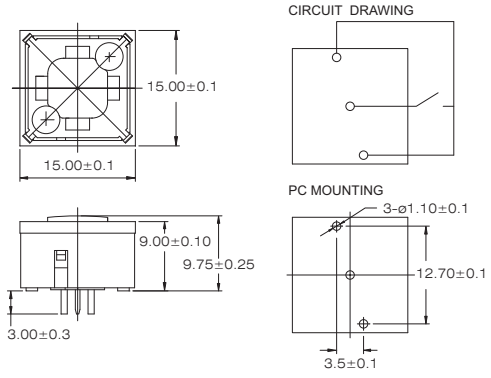


LT1-15-A0

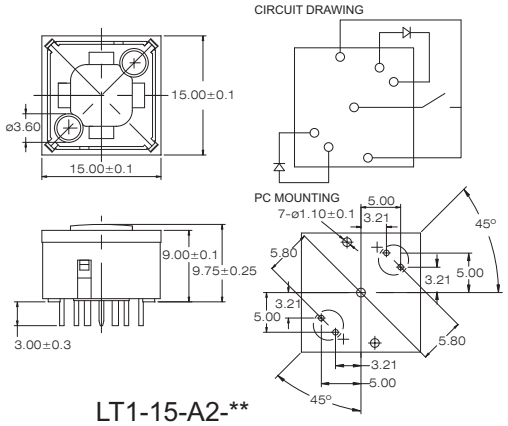

LT1-15-A2-**

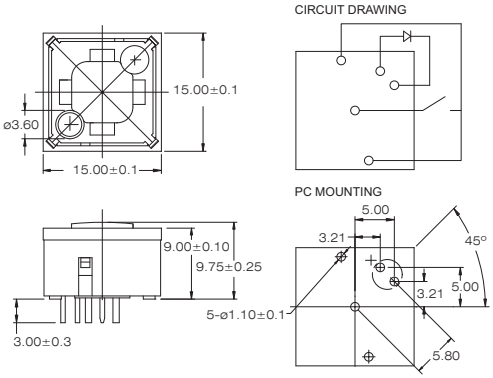

LT1-15-A1-*

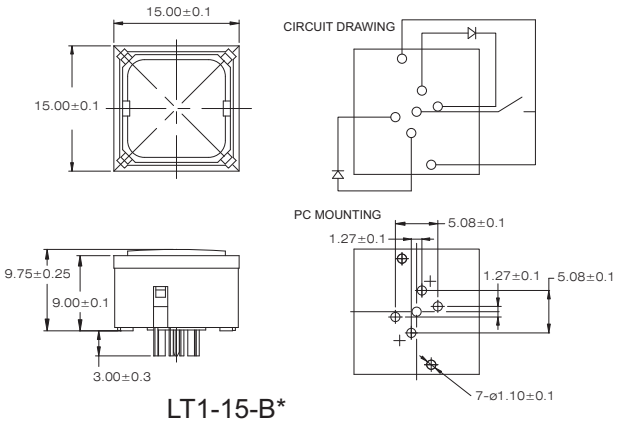

LT1-15-B*

HOW TO ORDER

LT1 - 19 - HT - A 0 - □ - □ - □ - □

- LT1 Series
- Size: 19 : 19 x 19mm; 15 : 15 x 15mm
- HT material: □ = none; HT= High temperature
- Actuator: Transparent actuator
- LED quantity: 0 : no LED; 1 : one LED; 2 : two LED
- LED Color: 1 : white; 3 : red; 5 : yellow; 6 : green; 7 : blue
- Another LED Color: 1 : white; 3 : red; 5 : yellow; 6 : green; 7 : blue
- Contact material: □ : Au version tin-plated; Q : silver plated
- RoHS code: H: RoHS Compliant

LT1 - 19 - HT - B1 - □ - □ / □ - □ - □

- LT1 Series
- Size: 19: 19 x 19mm; 15: 15 x 15mm
- HT material: HT= High temperature
- Actuator: Color panel actuator
- Actuator color: 1 : white; 3 : red; 5 : yellow; 6 : green; 7 : blue
- LED quantity: □ = standard (the actuator is as same as the color of LED); 0 : no LED; 1 : one LED; 2 : two LED(the actuator is not as same as the color of LED)
- LED color: □ =standard; 1 : white 3 : red; 5 : yellow 6 : green 7 : blue
- Another LED Color: □ =standard; 1 : white 3 : red; 5 : yellow 6 : green; 7 : blue
- Contact material: □ : Au version tin-plated; Q : silver plated
- RoHS code: H : RoHS Compliant

The dimensions in the catalogue and website are for reference only, not suitable for formal acknowledge.