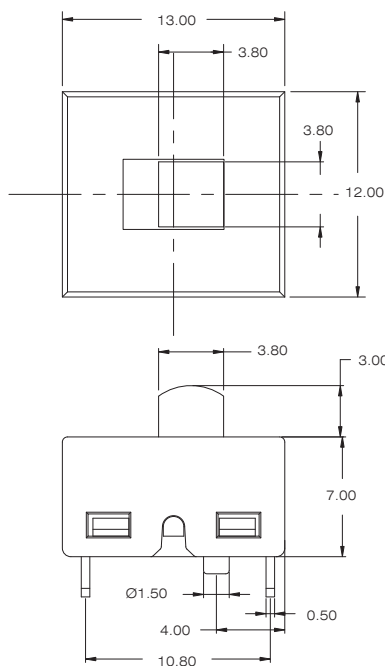

SPECIFICATIONS


CONTACT RATING: 12A 125 VAC ; 6A 250VAC T105
 ELECTRICAL LIFE: 10,000 cycles
 CONTACT RESISTANCE: 50 mΩ max. (initial)
 INSULATION RESISTANCE: 100 MΩ min.
 DIELECTRIC STRENGTH: Terminal-Enclosure 1,500VAC
 Terminal-Polarities 500VAC
 OPERATING TEMPERATURE: -10°C to +105°C


MATERIALS


HOUSING: PA9T Black
 ACTUATOR AND COVER: PA66 Black
 TERMINAL AND LEVER: C2680 1/2H, silver plated
 Contact: Silver alloy
 Spring: SWP
 Slide button: PTFE


DIMENSIONS


PCB Layout

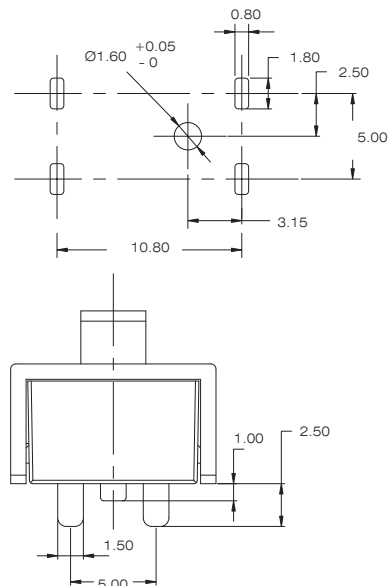

Circuit


HOW TO ORDER
