


SPECIFICATIONS

CONTACT RATING: 20A 125/250VAC
16(4)A 125/250VAC

ELECTRICAL LIFE: 10,000 cycles

CONTACT RESISTANCE: 50 mΩ max. (initial)

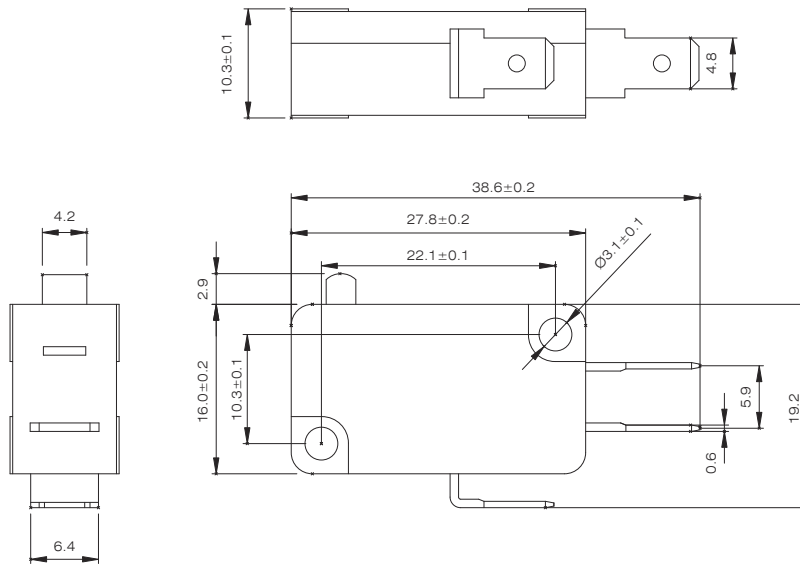


INSULATION RESISTANCE: 2MΩ min. between contacts

7MΩ min. between contact and actuator

DIELECTRIC STRENGTH: 1500V between contacts

3000V between contact and shell

OPERATING TEMPERATURE: -40°C to +85°C


DIMENSIONS

Mounting hole dimensions

Contact configuration

HOW TO ORDER
