


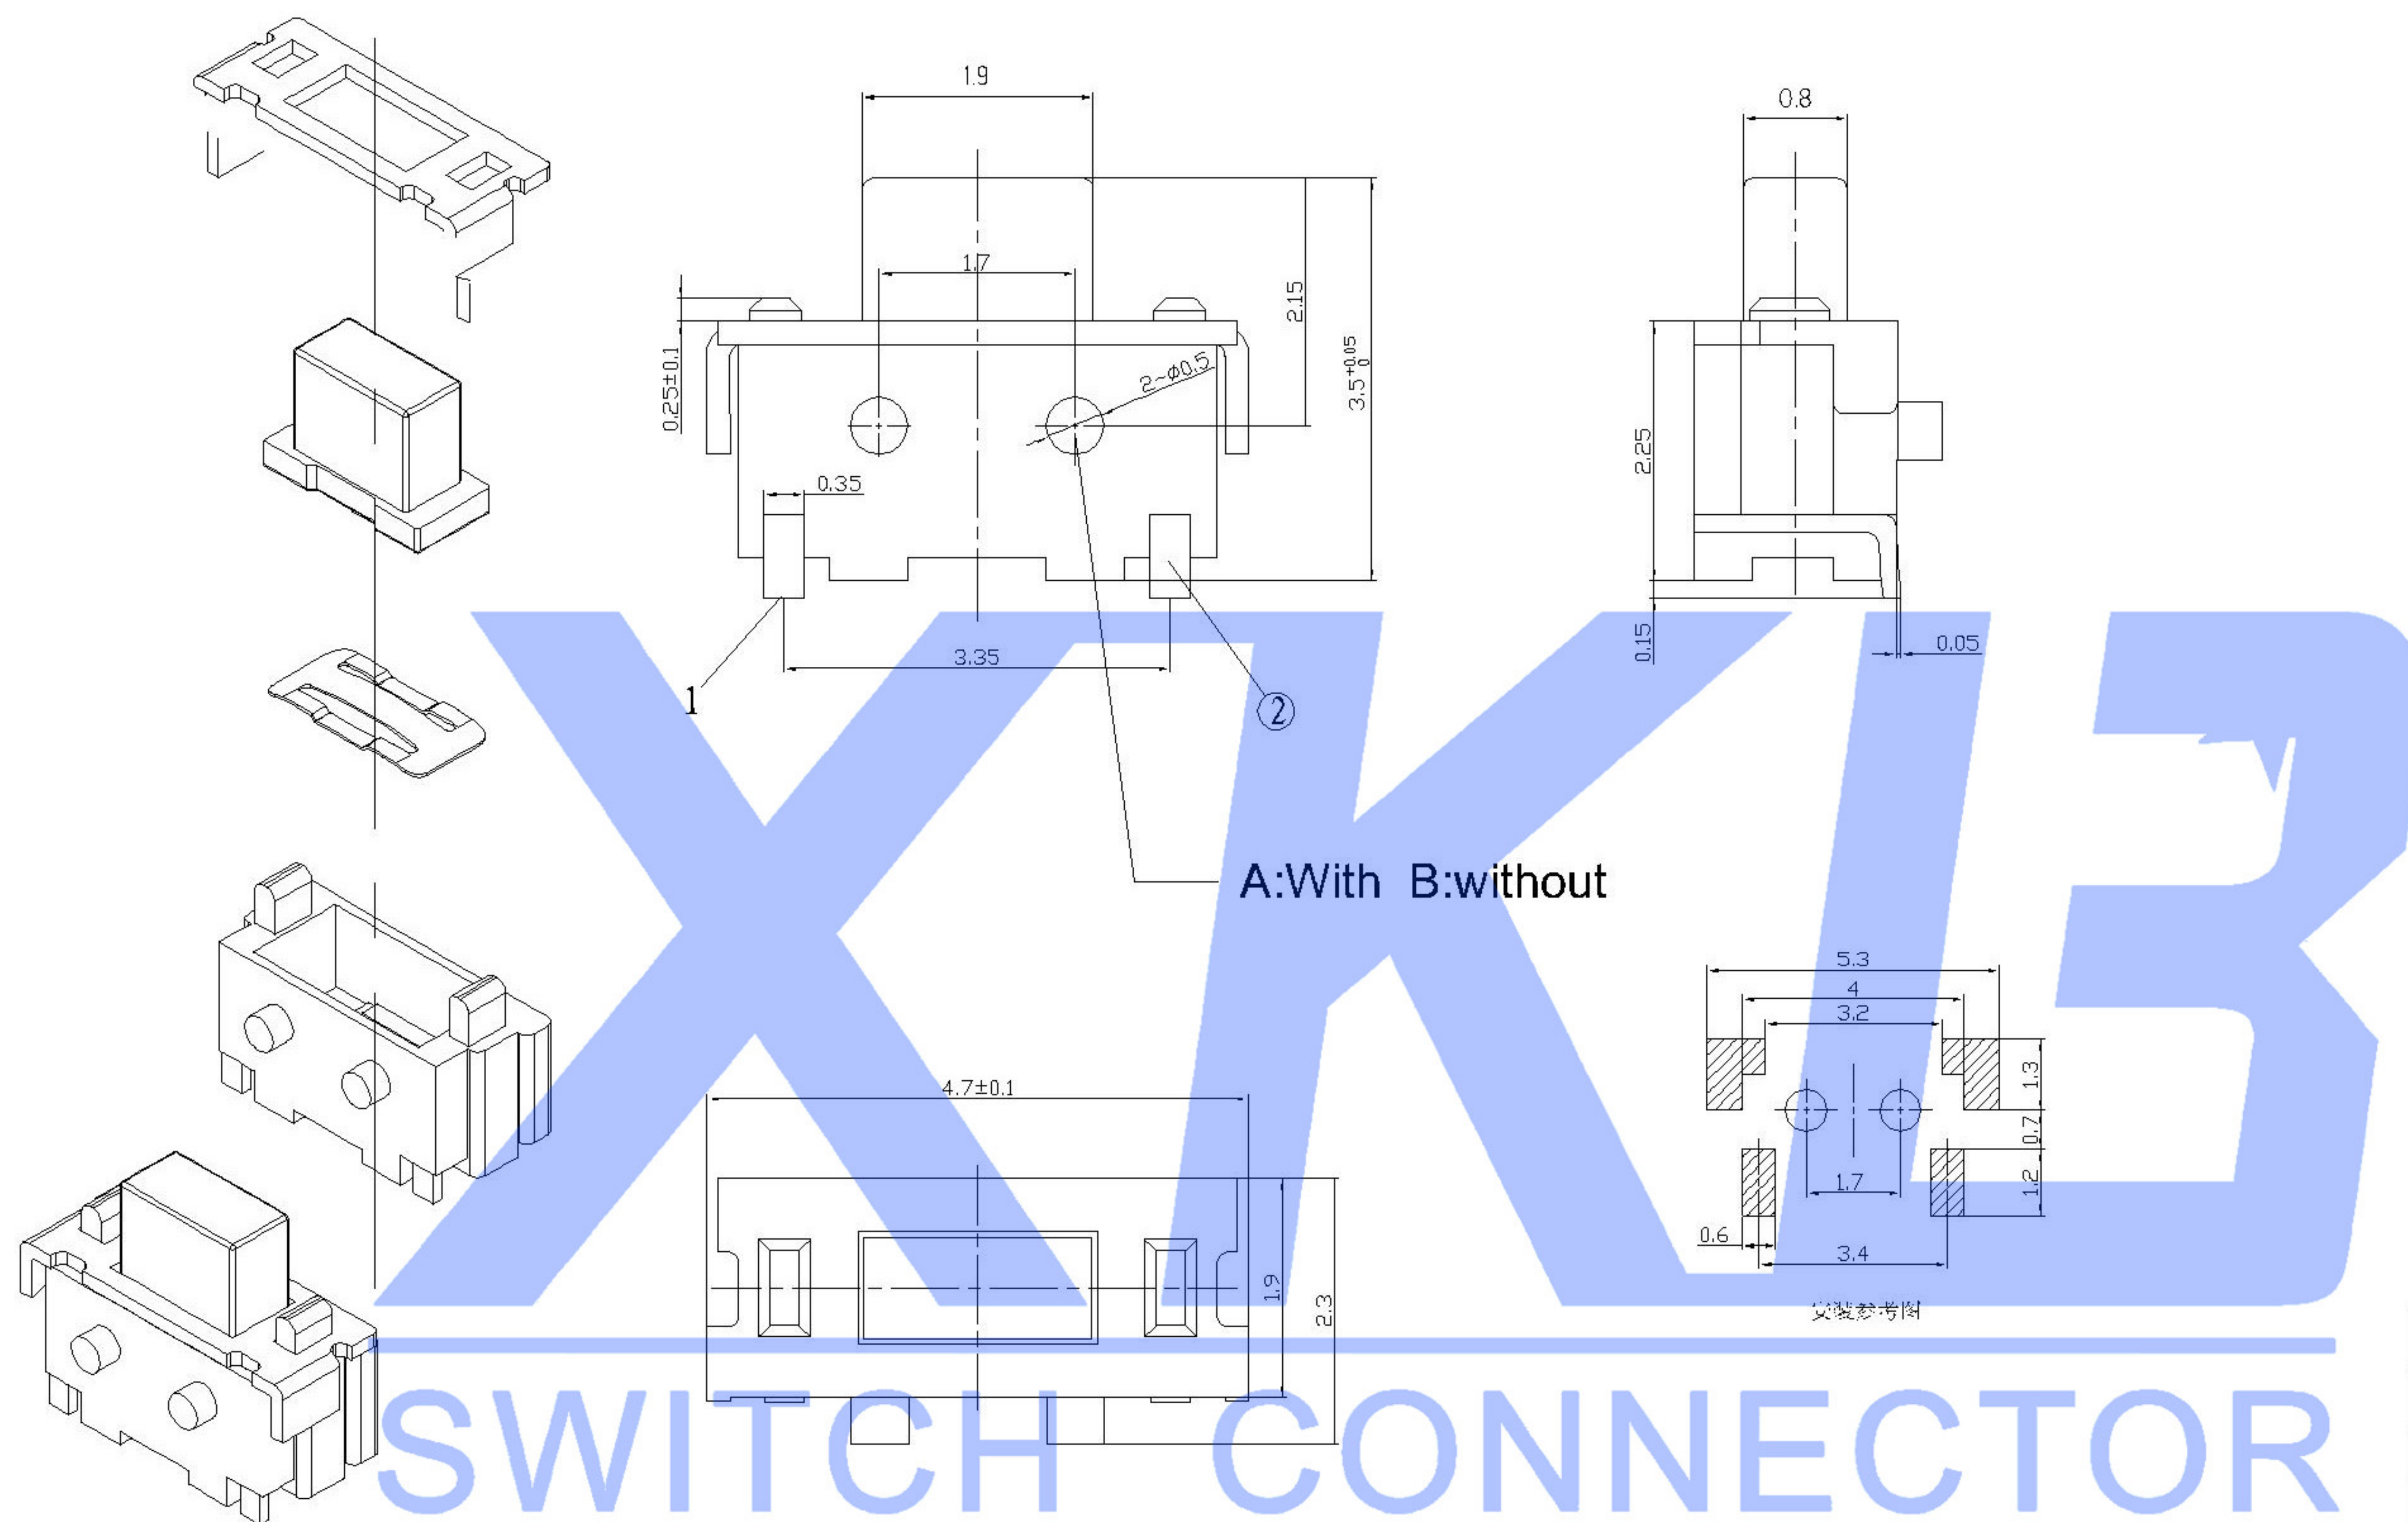


SPECIFICATION

Contact Rating 50mA, 12V DC
Contact Resistance 100mΩ max.
Insulation Resistance 100MΩ min. 500V DC
Dielectric Strength 250V AC/1 minute
Travel 0.15mm
Operating Temp. -25°C ~ +70°C
Storage Temp. -30°C ~ +80°C

PAPT NO	TS-1010-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	II: 3.5
Fixed column	A:With B:without

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	2	F.ag/SUS		—
③	Base	—	1	LCP	Natural	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	LCP		—

ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK
DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH	
DWN		DATE		VIEW: 	PART NO.:	
CHKD		DATE		UNIT: mm	DWG NO.:	
APPD		DATE		SIZE: A4	TS-1010-X-X	
				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0

					units: mm
△X					tolerance:
△X					X.X ±0.2mm
△X					X.XX ±0.1mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					

XKB INDUSTRIAL PRECISION CO.,LIMITED