

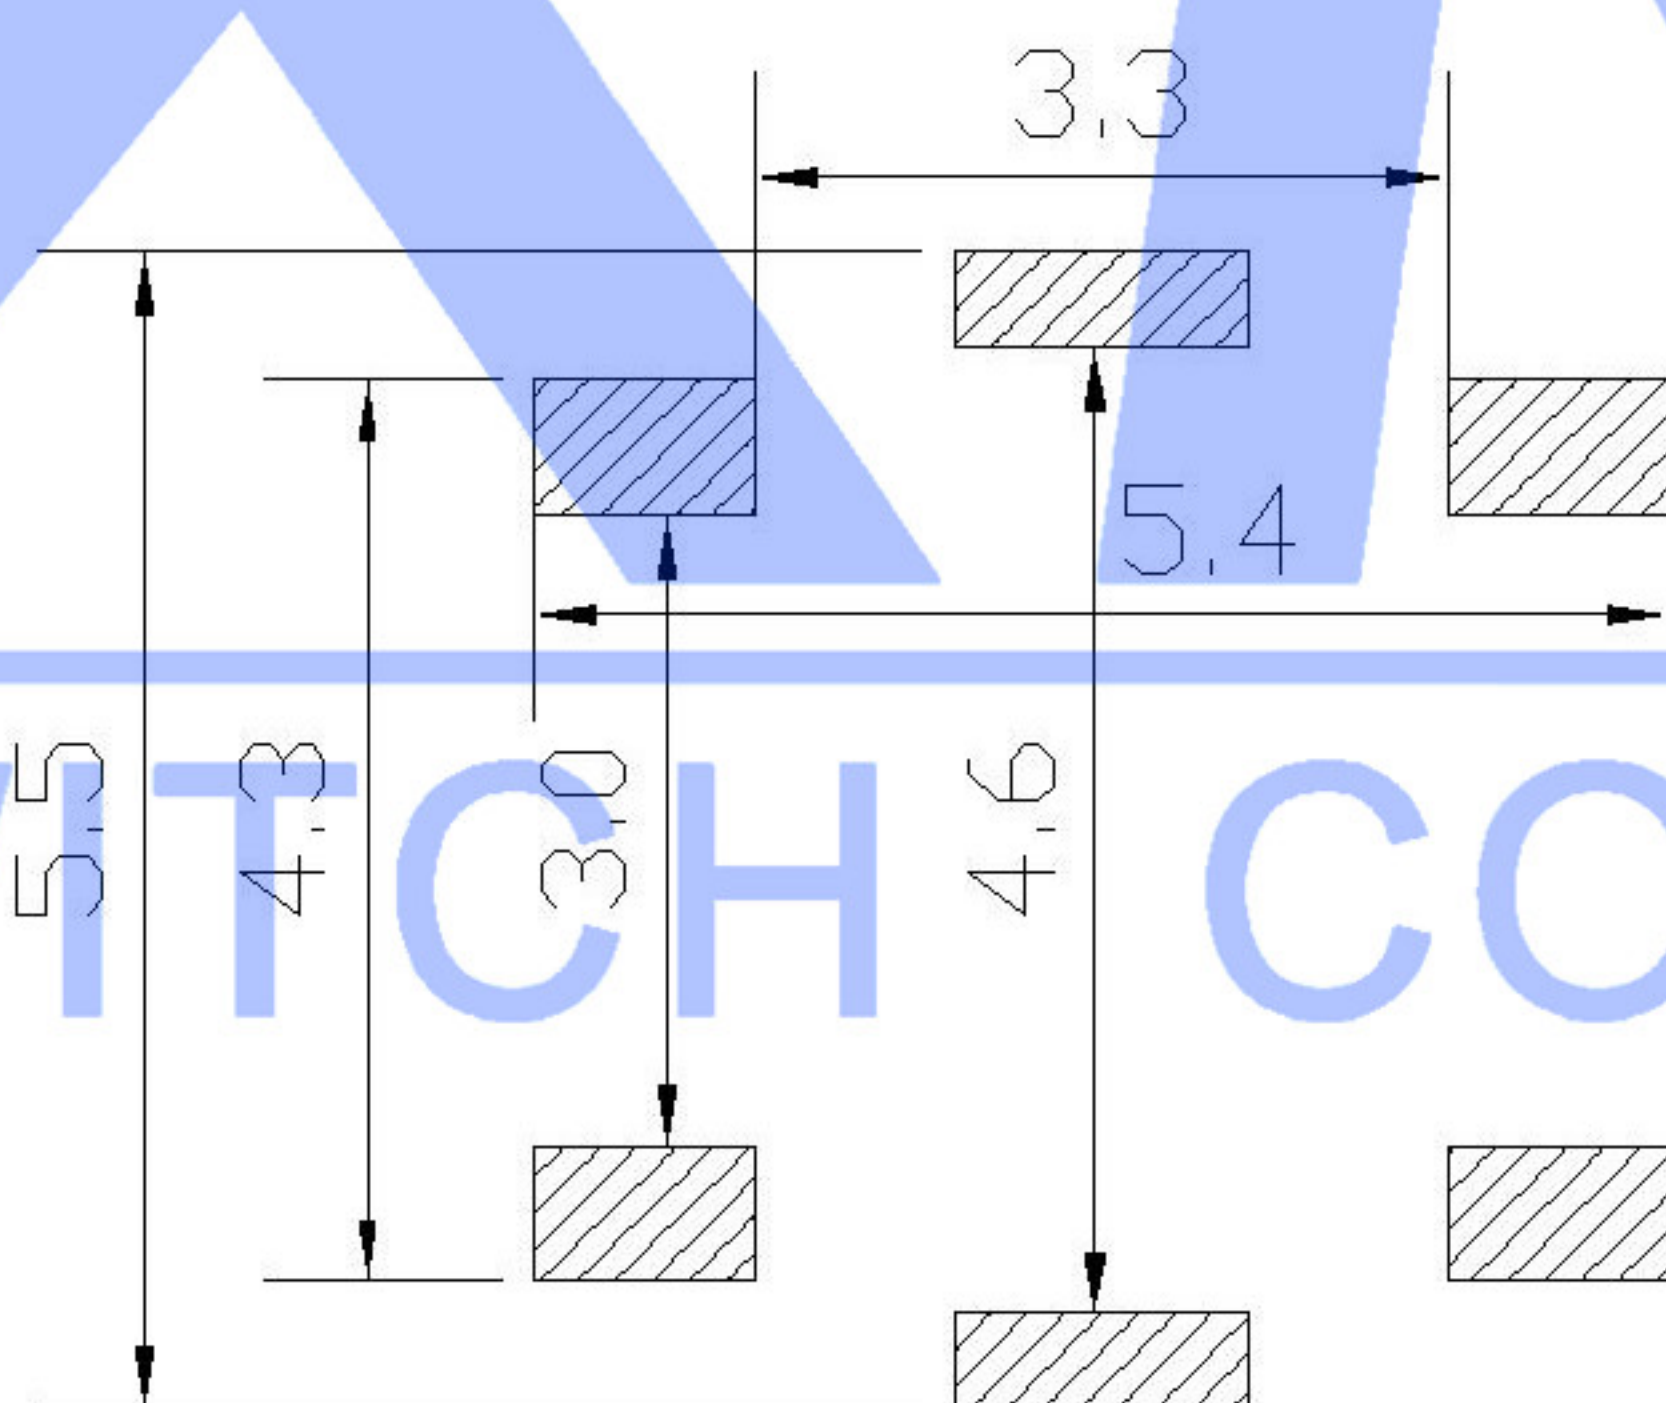
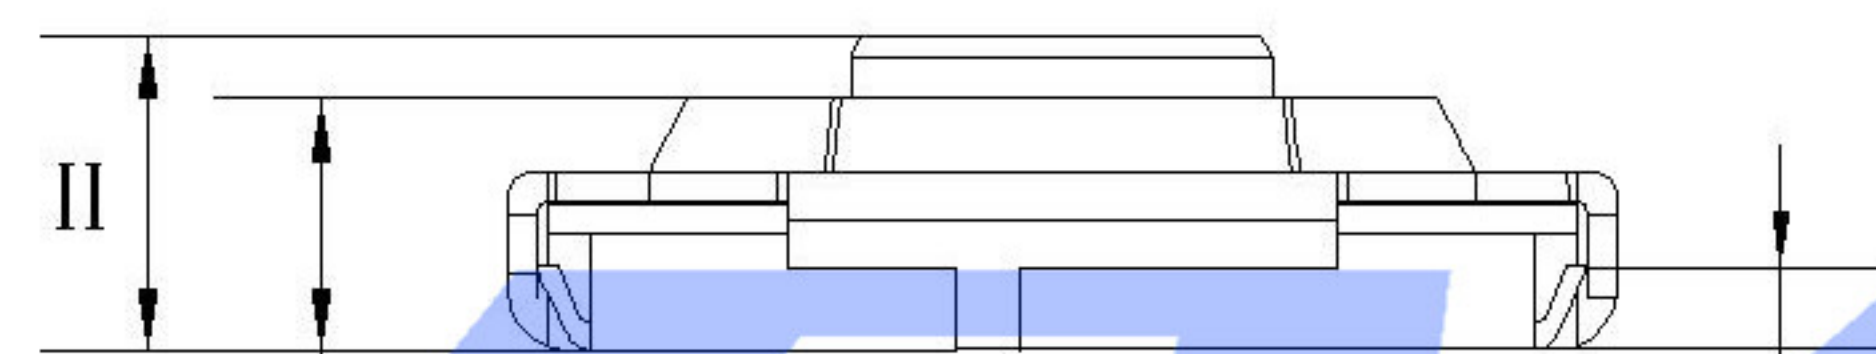


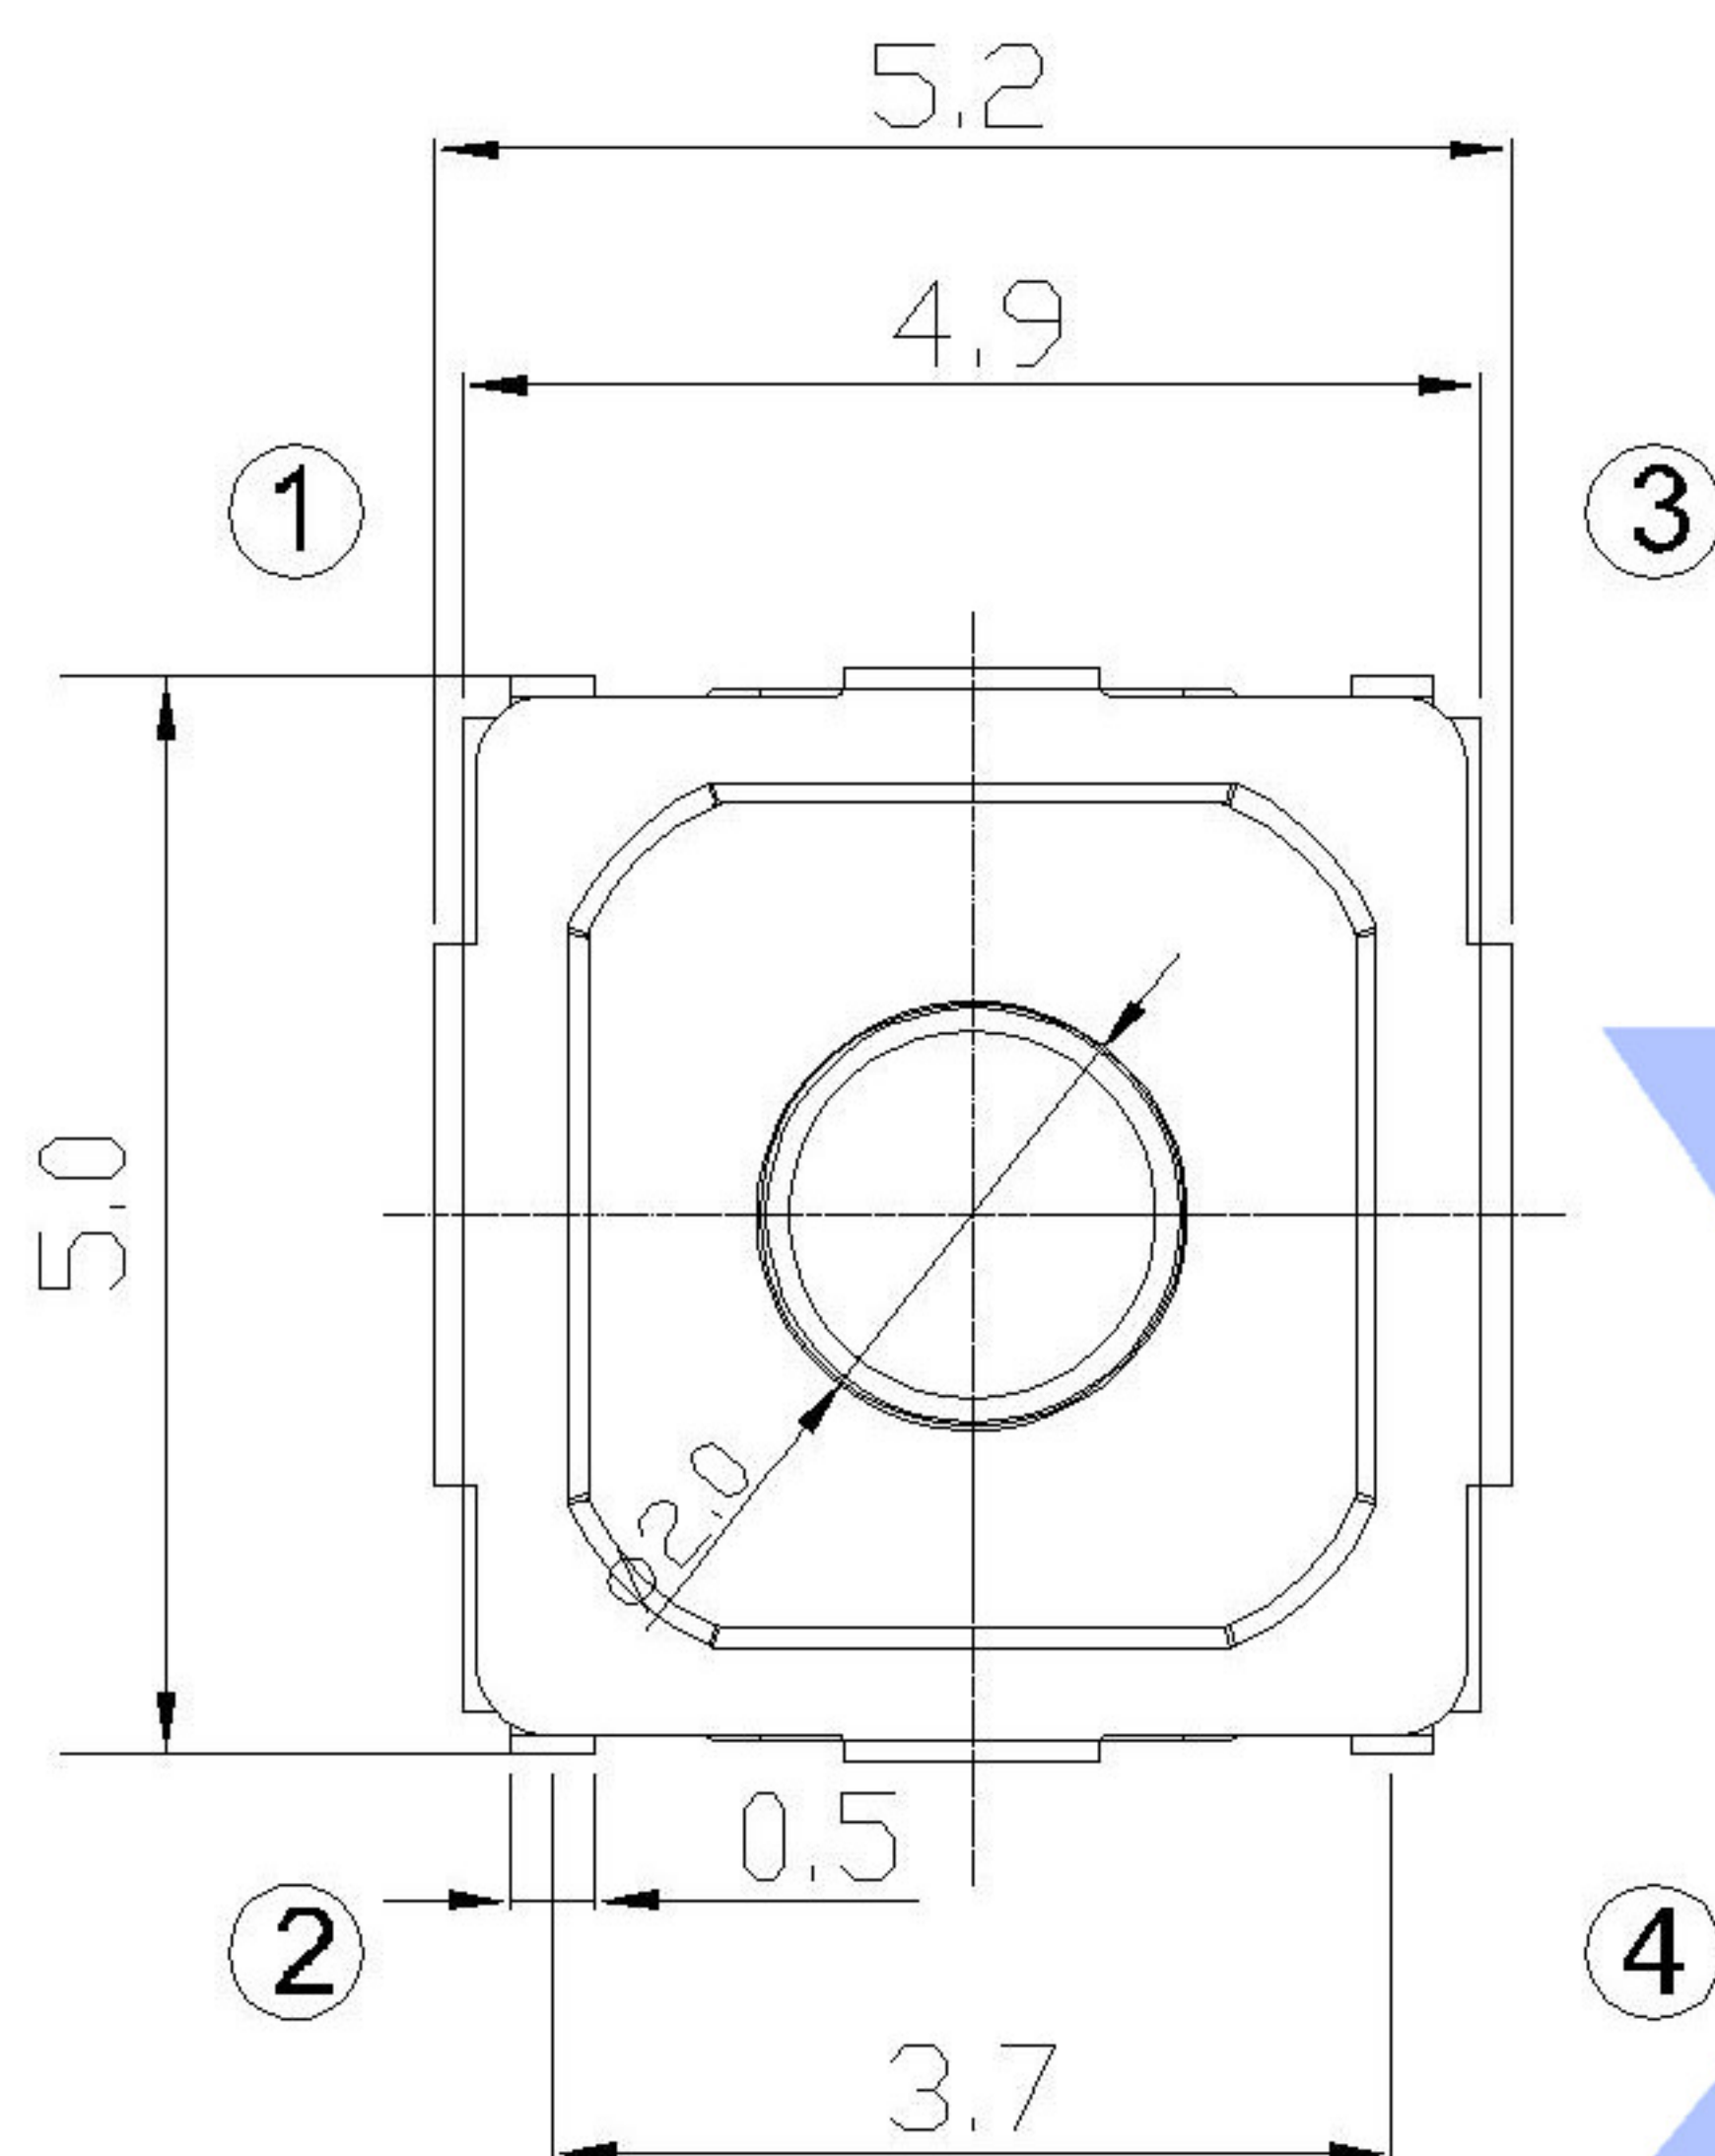

P.C.B Mounting
pattern Dimension

Circuit Diagram

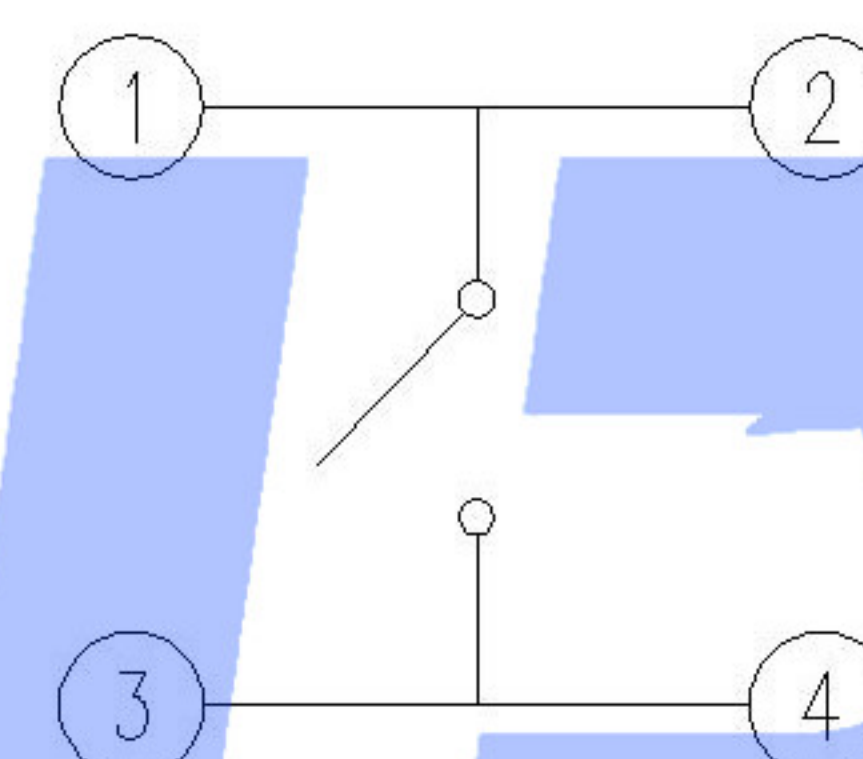


Code-X	H
A	1.5
B	1.6
C	1.7
D	2.0
E	2.5
F	3.0
G	3.5
H	4.0
I	4.3
J	4.5
K	5.0

SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C +70°C
Storage Temp.	-30°C +80°C

PAPT NO	TS-1187E-X-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	Code-X
Keystake	A: PA46 B: Brass

⑤	Terminal	—	4	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS	—	—
③	Base	—	1	PA46	—	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46/Brass	—	—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW: 	TACT SWITCH
CHKD		DATE		UNIT: mm	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO.,LIMITED					TS-1187E-X-X-X
WEIGHT		SHEET		REVISION	
1.0g		1/1		A0	

units: mm

tolerance:

X.X ±0.2mm

X.XX ±0.1mm

X.XXX ±0.05mm

UNSPECIFIED TOLERANCES

△X	DESCRIPTION	DATE	REVISED	APPROVED
△X				
△X				
MARK				

REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn