

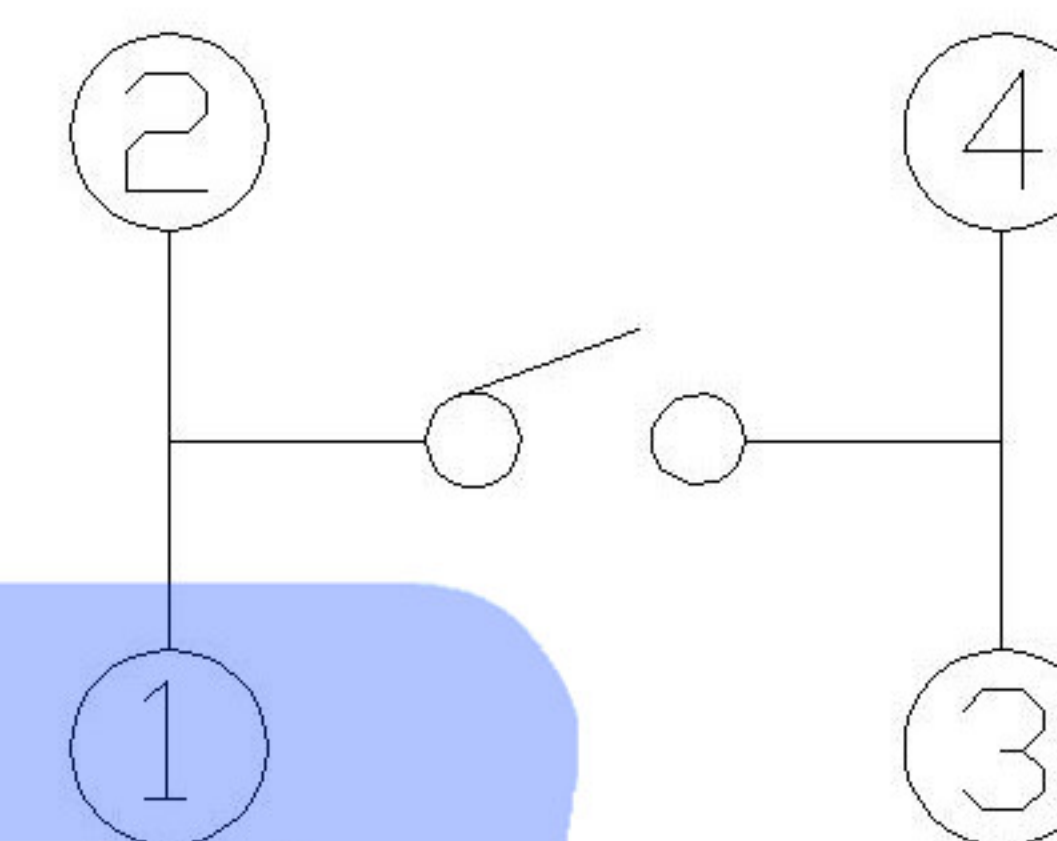


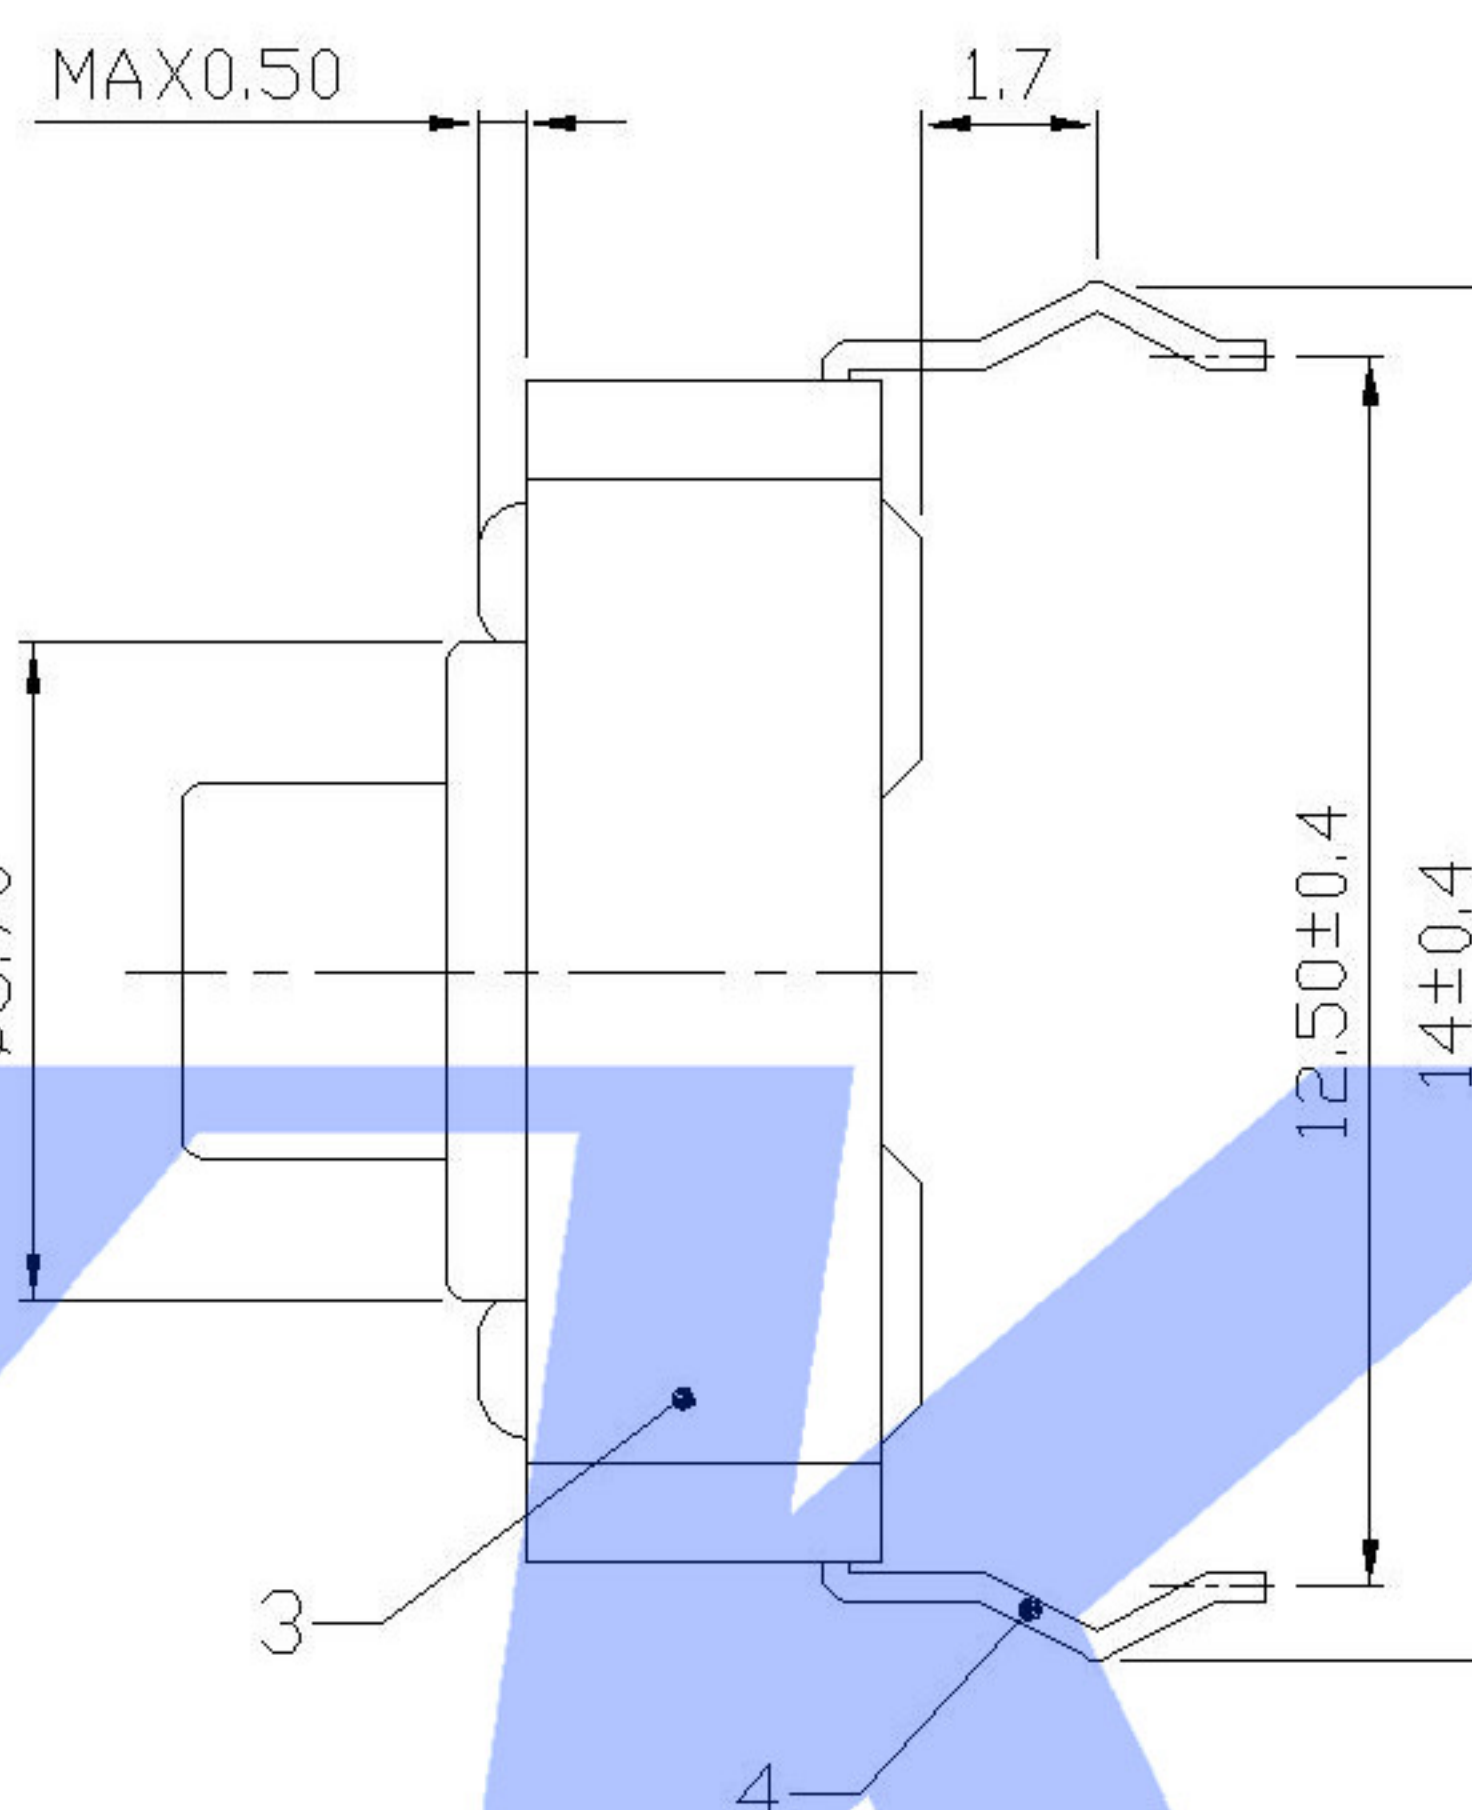

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C +70°C
Storage Temp.	-30°C +80°C

PAPT NO	TC-1103T-X-X
Operating force	B:160gf C:260gf
Height	H:7.3
color	B:Black Y: Yellow

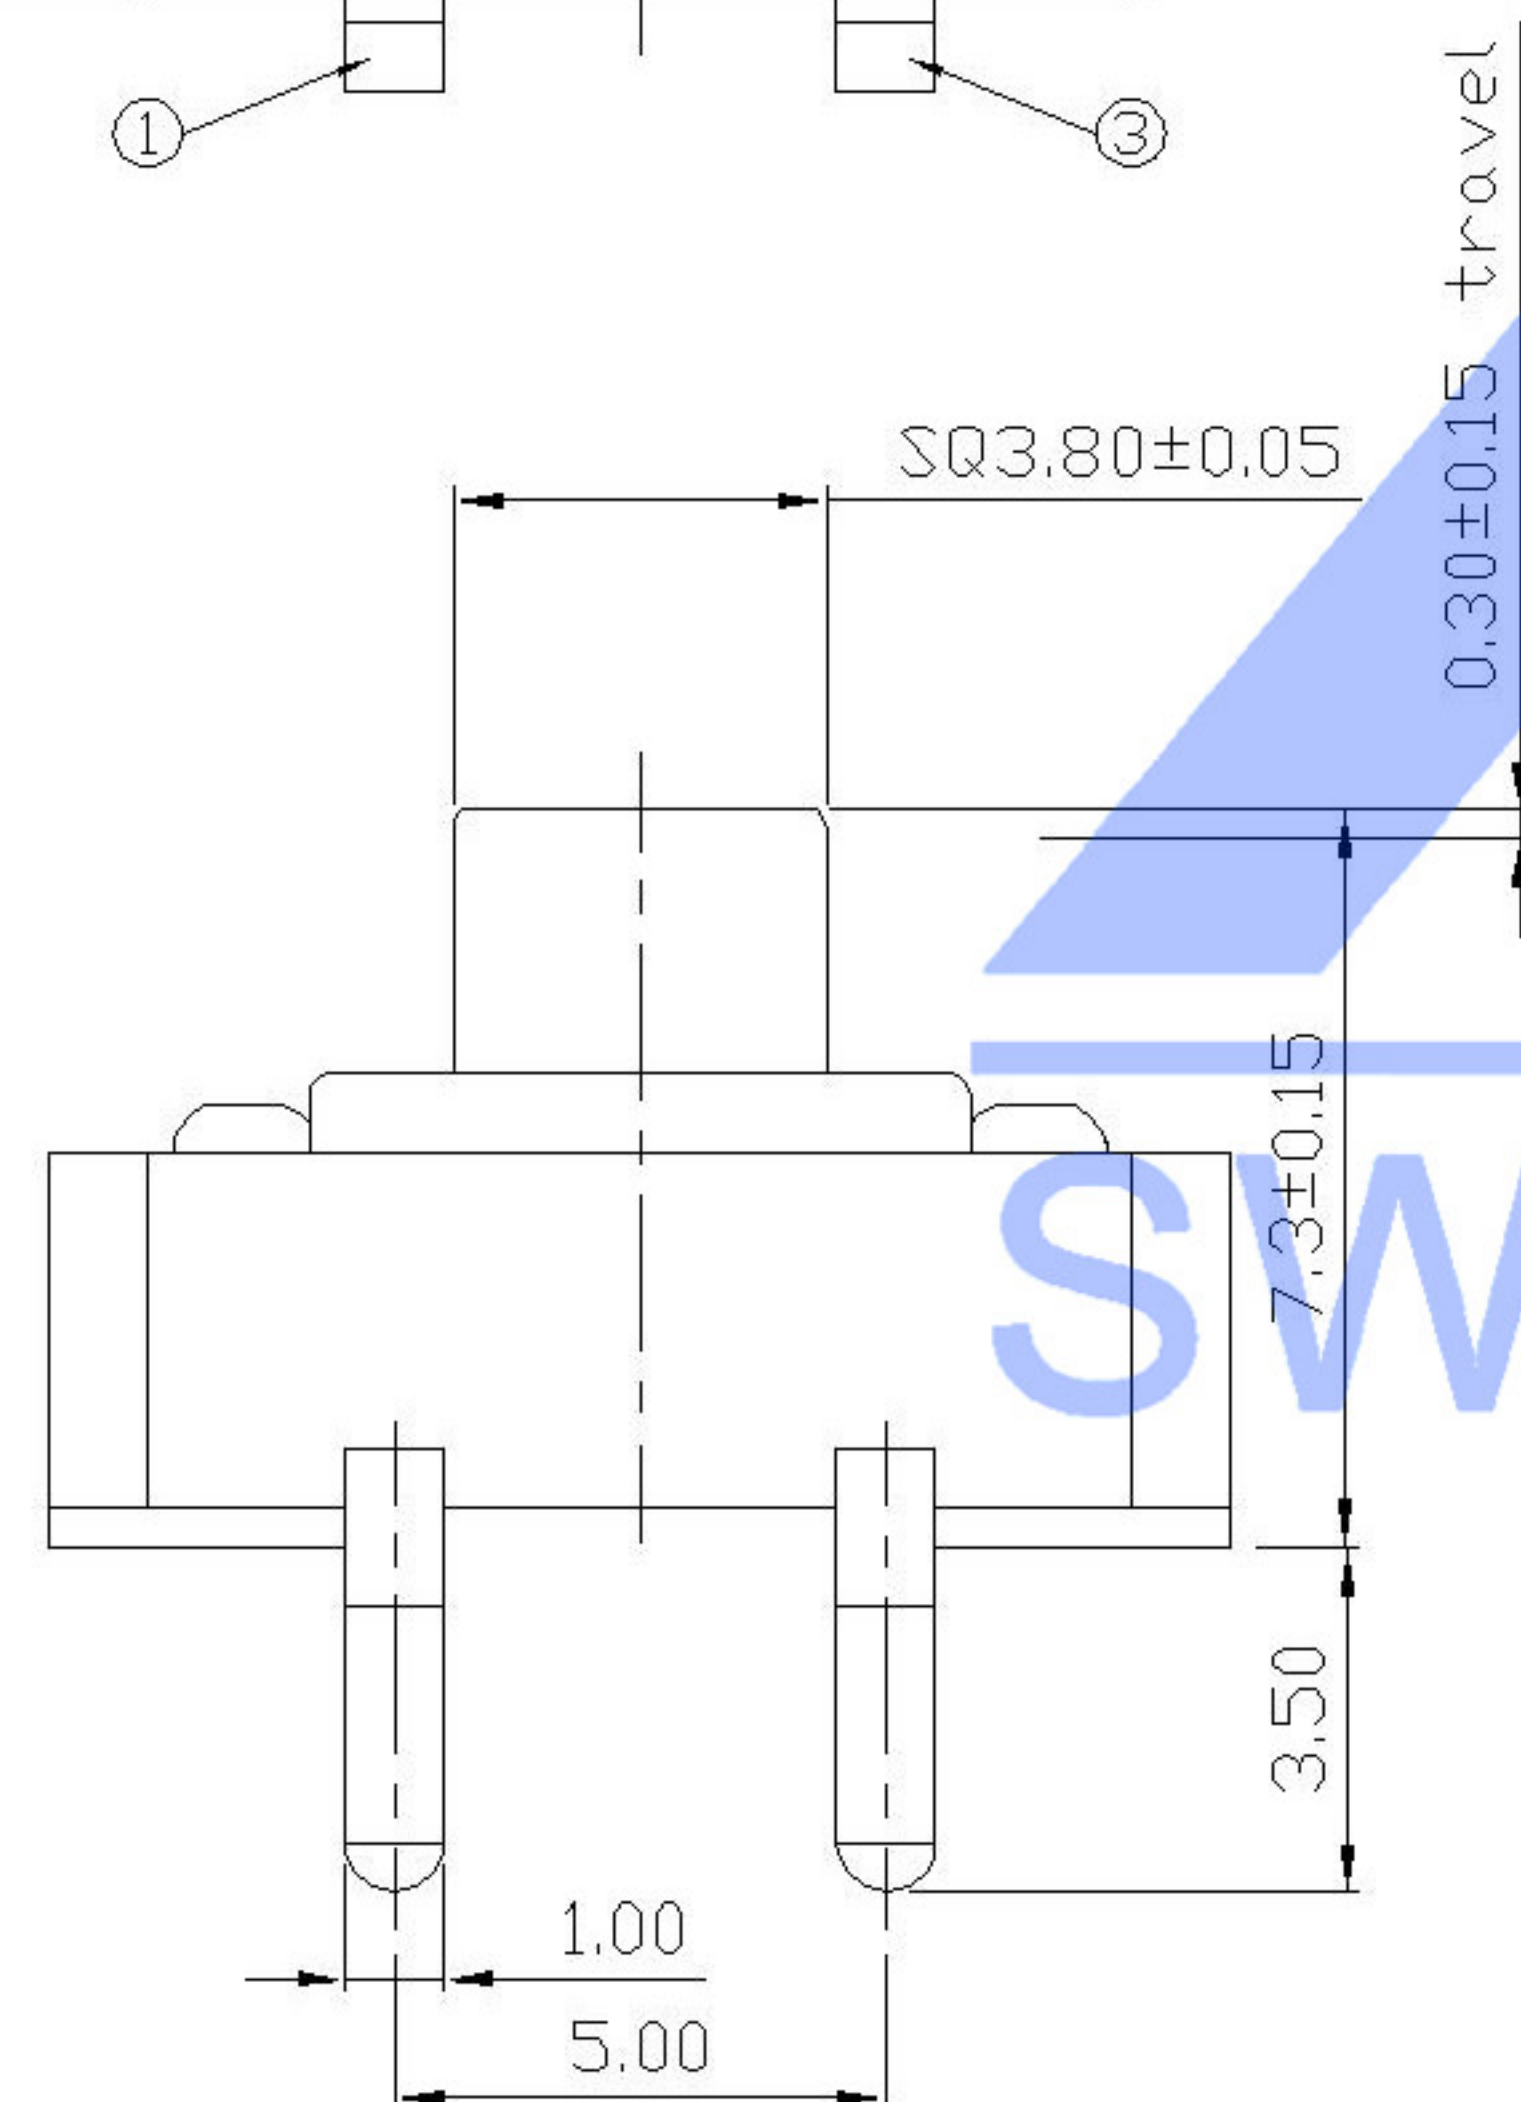

P.C.B MOUNTING PATTERN DIMENSION

Technical drawing of a switch connector. The drawing shows a side view of a component with a curved profile. Key dimensions are indicated: a vertical dimension of 7.3 ± 0.1 on the left, and two horizontal dimensions of 12.50 defining the width of the component. A diagonal dimension of $\phi 1.20$ is shown at the top left corner.

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△X					L≤4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.: TC-1103T-X-X		
△X					4<L≤16	±0.3								
△X					16<L≤63	±0.4	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L>63	±0.5								
					REVISIONS		UNSPECIFIED TOLERANCES							
					www.xk-dg.cn www.helloxkb.com www.helloxkb.cn		XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g	SHEET 1/1	REVISION A0