

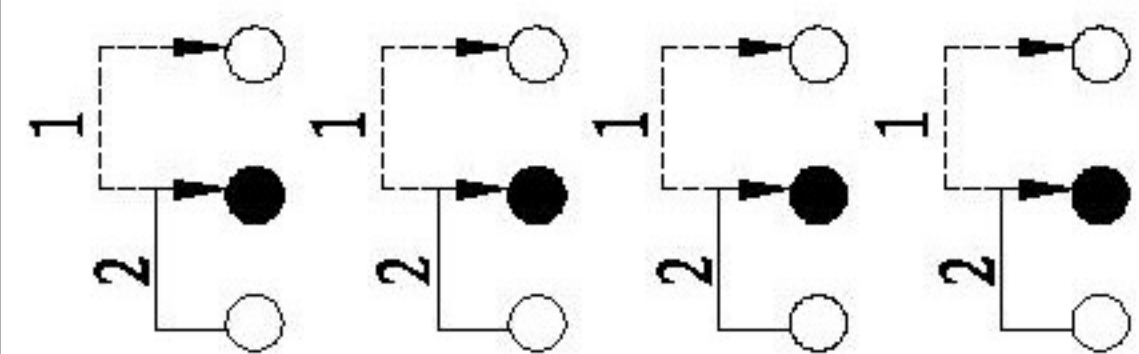
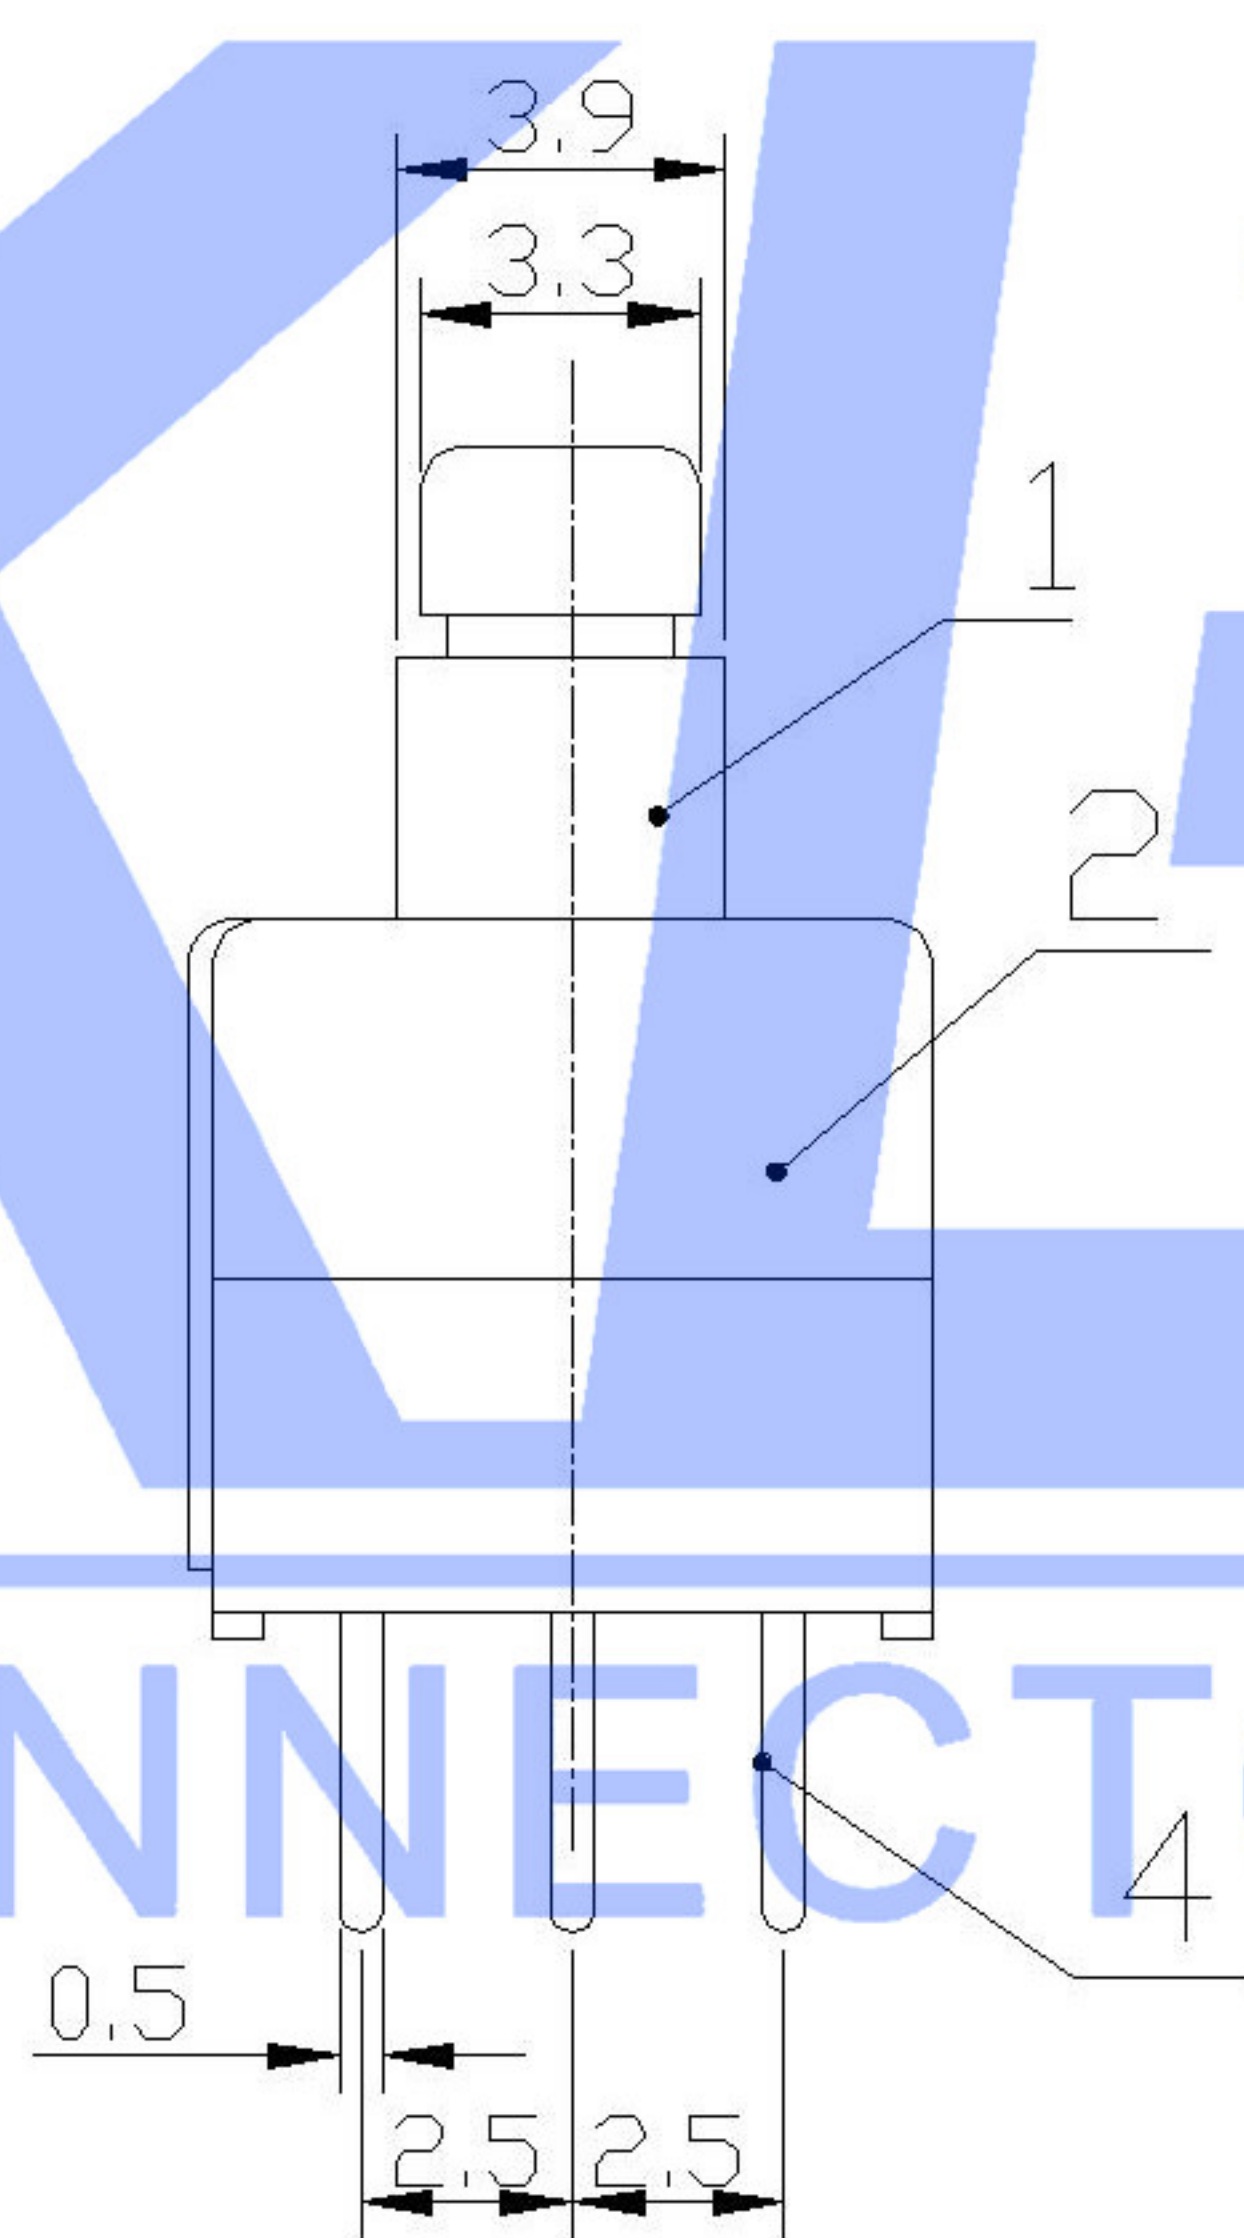


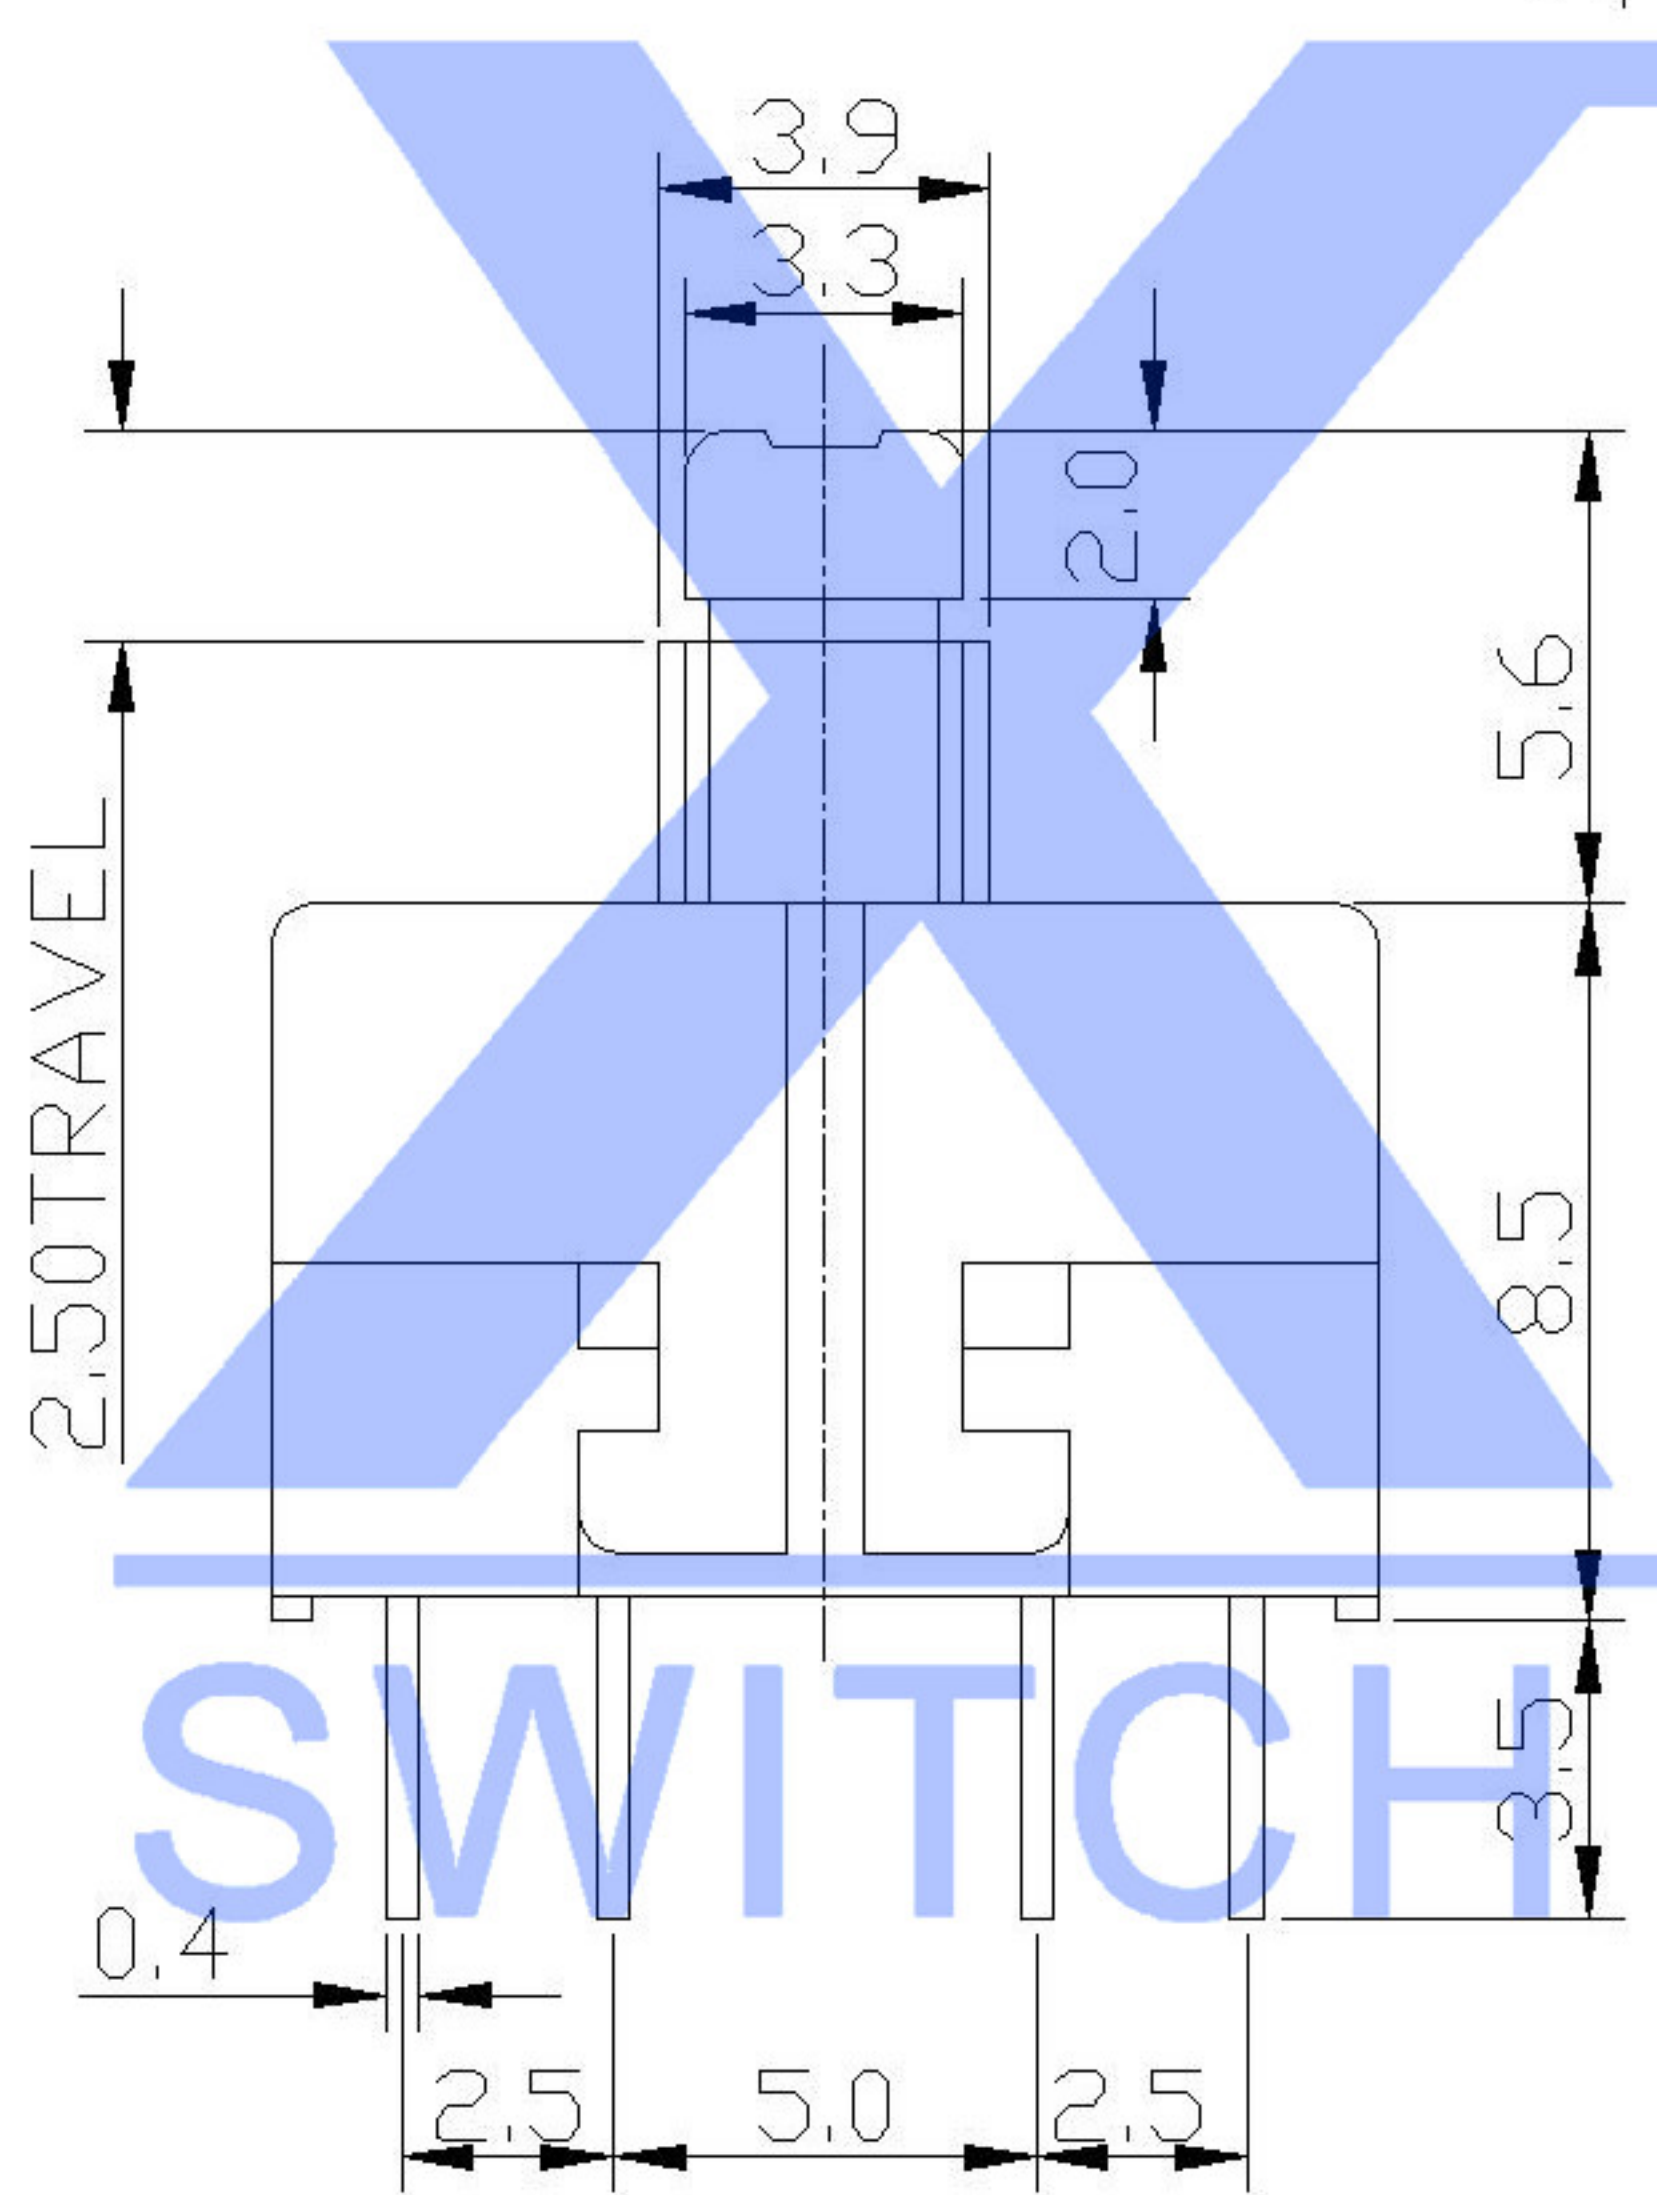

SCHEMATIC

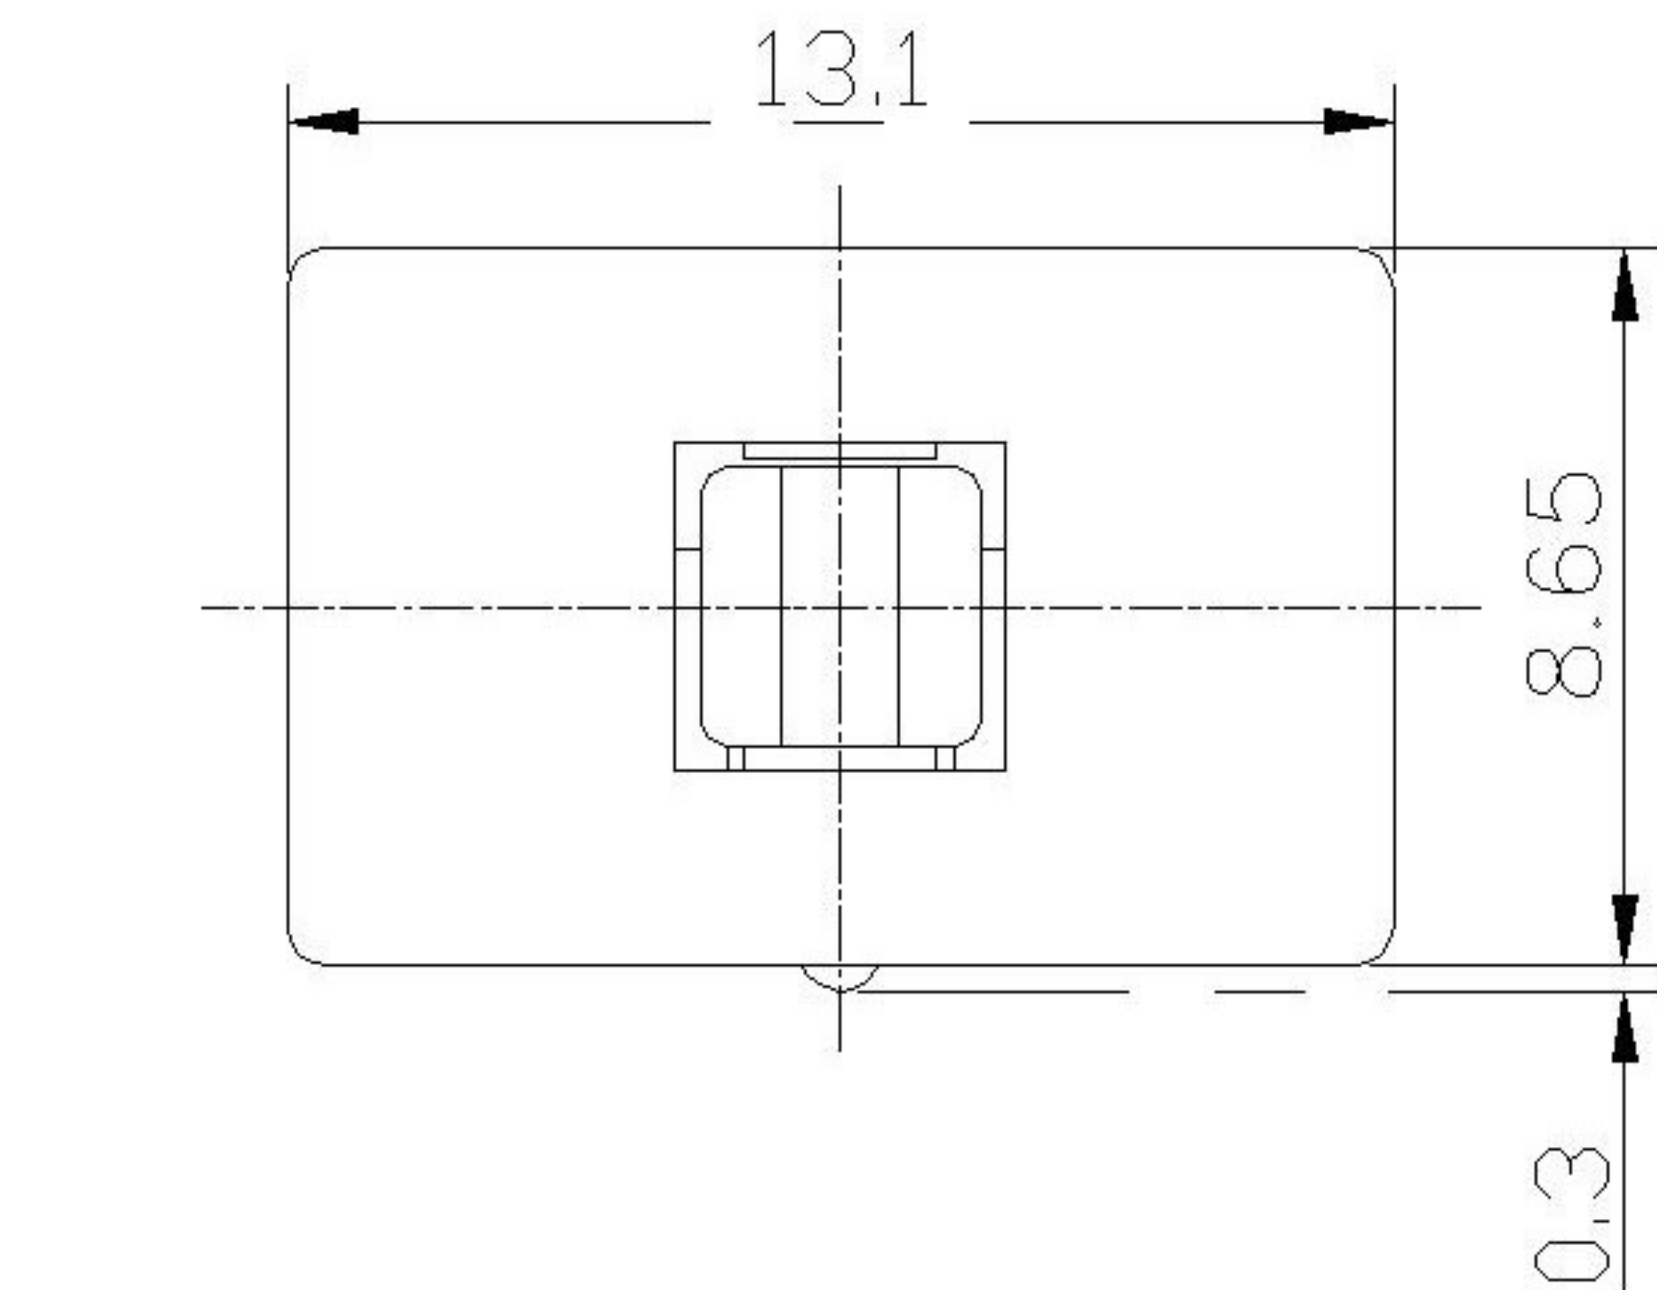

FEATURES

- Light operating force.
- Long term low contact resistance.
- Momentary or latching operation.
- Short stroke 1.5mm to latch.
- Compact spacing on PCB of 13X 8.5mm.

SPECIFICATIONS

1.ELECTRICAL

● Contact rating	0.1 A, 30VDC
● Contact resistance	50mW Max.
● Insulation resistance	100M W Min. at 250VDC
● Dielectric strength	250VAC Min. for 60 sec.

2.MECHANICAL AND ENVIRONMENTAL

● Temperature rating	Operating: +5℃ to +55℃ Storage: -25℃ to +65℃
● Operation force	160±80gf
● Stroke	Lock Stroke: 1.5±0.2mm Full Stroke: 2.5±0.2mm
● Operating life	Full load: 1 x 10 ⁴ cycles No load: 1 x 10 ⁵ cycles
● Contact form	DPDT

PART NO	XKB1385-X
OPERATION	W:NO LOCK Z:LOCK

							DSND		DATE		SCALE: N/A	MODEL TYPE: PUSH SWITCH			
					ANGLAR	±5'	DWN		DATE		VIEW: 	PART NO.:			
ΔX					L f 4	±0.2									
ΔX					4< f 16	±0.3	CHKD		DATE		UNIT: mm				
ΔX					16< f 63	±0.4									
MARK	DESCRIPTION			DATE	REVISED	APPROVED	APPD		DATE		SIZE: A4	DWG NO.: XKB1385-X			
REVISIONS							UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													1.0g	1 / 1	A0