
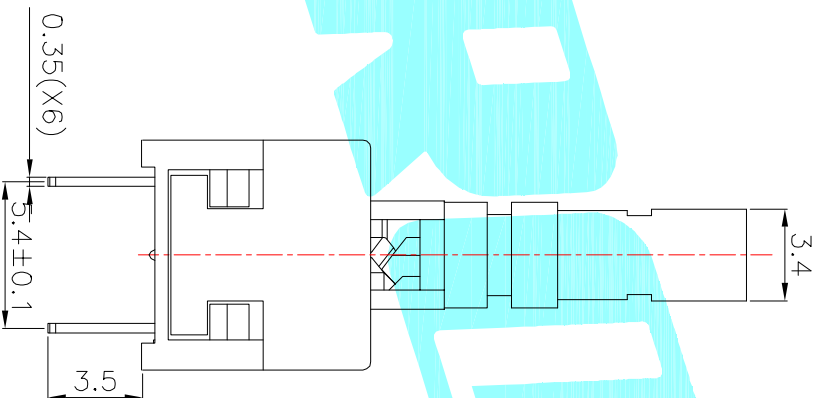
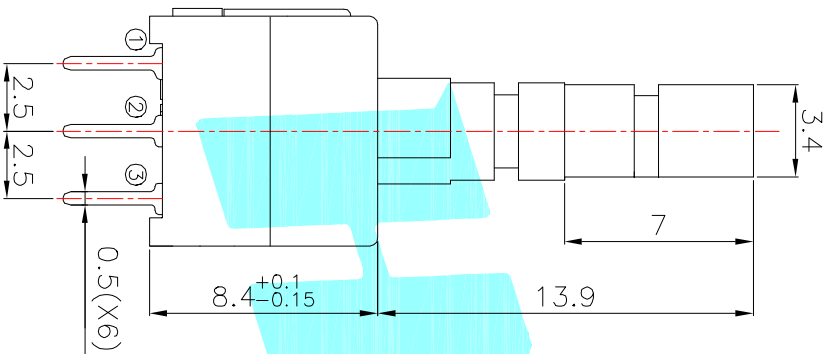



PCB Layout(Pattern Side)





Circuit Diagram

NOTE:

- 1. Operating Force: 240gf±80gf
- 2. Travel : 2.4±0.3mm

NO.	Operating Type	Part No.
1	Push To Lock	K8-8484F-L1W
2	Push No Lock	K8-8484F-N1W
3	Push No Sound No Lock	K8-8484F-NNW

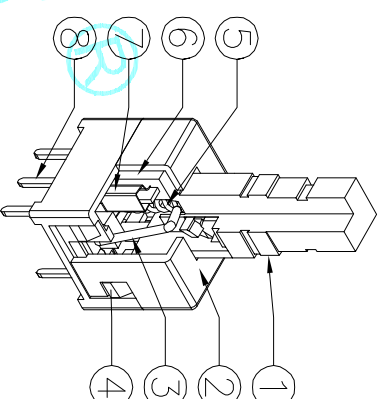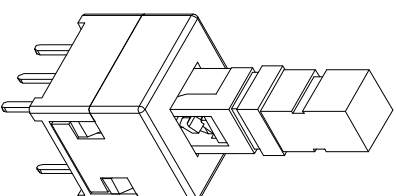

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Terminal	—	6	Brass strip	Plating silver	—
⑦	Contact	—	2	Phosphor bronze	Plating silver	—
⑥	Securing glue	—	2	PA66	Black	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	PBT	White	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	Black	—
①	KNOB	—	1	POM	White	—

APPROVALS	DATE	TITLE:
DRAWN J.X.Zhong	2013/10/23	ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—
TOLERANCES ARE			30~0.1±	±0.30	ANGLE	PART NO.
			10~30	±0.20		
			5~10	±0.15	±2°	SCALE: 1:1
			~5	±0.10		PROJ. SHEET 1 OF 1